

SIEVERT®

Heating tools for professionals



Product Catalogue 2018



reddot design award
winner 2017



Powerjet



DW 3000



Handyjet

“The Red Dot winners are pursuing the right design strategy. They have recognised that good design and economic success go hand in hand. The award by the critical Red Dot jury documents their high design quality and is indicative of their successful design policy.”

Swedish design and quality since 1882


In your hand you hold Sievert's whole product range. But behind all the product pictures and article numbers there is a lot more.

This unseen Sievert represents more than hundredthirty years of technical progress - decades of technical support and discussions with users - years of providing thoughtful service - days of unceasing effort to find new possibilities.

Our stated goal is both simple and straightforward: to develop, manufacture and supply innovative and high-quality tools and tool systems for all types of soldering and heating applications.

This statement is not just a definition of our product range – it is also a promise. A promise that we will always be one step ahead and that we will always listen to you – our customer – and involve ourselves in your business. A promise that we will be close to hand wherever in the world you may be. A promise that we will be the working partner that you need, helping you achieve the greatest possible success in your business when you use our products and services. Whatever the jobs you may have on today. Whatever the jobs you may have in the future.

We have been in business for more than 130 years, and today our products lead the world. But it still seems that our work has only just begun. Welcome to Sievert.

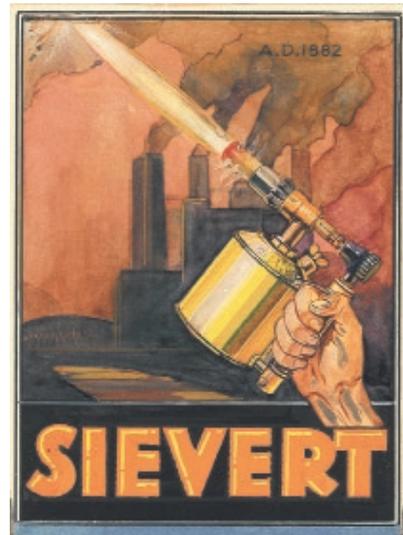

The concept is over a hundred years old but the flame still burns as brightly today

Because Carl Richard Nyberg was a specialist in soldering, he knew all too well that the soldering technology available in the 1880's left a lot to be desired.

But C.R. Nyberg was a stubborn man determined to find a heating source that would make the work more efficient. After much experimentation at home in his little flat he succeeded in finding a solution and in 1882 he had the first prototype of his soldering blowtorch ready for use, for which he also obtained a patent.

In the same year, the future industrialist Max Sievert opened the doors of the machinery business in Stockholm that was to form the foundation of a major company. When the paths of Nyberg and Sievert later crossed, the partnership they created was uncommonly fruitful. Nyberg manufactured blowlamps and Sievert sold them throughout the world. A successful business was launched.

SIEVERT®

Our products represent today's most advanced technology

But our ambition extends far beyond this.

Wherever you are

Sievert has its origin and head office in Sweden, but with sales in more than 60 countries in five continents, it should be viewed as a truly global business. Few other companies in our industry can boast such geographical coverage.

Our geographical spread also has major benefits for our customers. One is our accessibility and the availability of high standards of service. Another is the experience that we gain of different countries and different industries, which is of immense benefit in our ongoing development work.




Whatever you need

Our goal is to be able to offer professional products at the top end of the quality scale for any possible type of soldering or heating task that needs to be done. Whether the job is large or small and whether you are a demanding professional user or a demanding Do-It-Yourselfer.

It is you that controls our work

These days it is not enough to do a good job. You must do the job better, more efficiently and if possible cheaper than anyone else. That is what counts today.

Accordingly, it is vital that we at Sievert understand how you and all our other customers operate – what your daily work involves. In this way we can become a better supplier, providing the products that will best meet the precise requirements of your individual business. In many cases we have modified products to match specific requests and these have then become part of our standard range of products. This is how you can – and should – control our work, because at the end of the day it is your work that really matters.

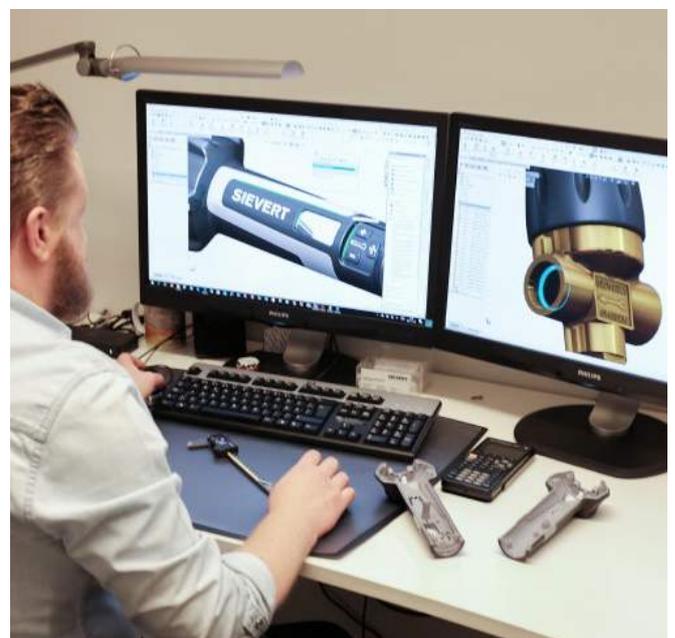

Quality means more than what you see

The piezoelectric igniter is guaranteed for 30,000 operations, and works faultlessly even if the handle is exposed to moisture. Every smallest detail is contrived and machined to function perfectly. We use the very best steel and the most advanced production technology.

Even so, Sievert quality means much more than reliable operation and a long working life. It means knowledge of the user's daily work and long experience of the industry. It means a worldwide organisation. It means the products and range of accessories that make up the whole Sievert System. All this comes as standard under what we mean by Quality.



World leaders - but we are never satisfied

"Anything good can be made even better" summarises the spirit of our day-to-day work. This doesn't mean that our current products are not as good as we can make them – rather, that we constantly improve our products to match the changing world outside. Being innovative requires more than undertaking technical development for its own sake; it means foreseeing future changes. A good example is our new electronic product range, which complements our established range to make us a complete supplier.

Heating tools for professionals





Promatic System

Page 10



Pro 86 System

Page 18



Pro 88 System

Page 24



Soldering irons Systems

Page 32



Propane hoses & accessories

Page 38



Regulators and HFVs

Page 40



Refillable cylinders

Page 42



Disposable cartridges

Page 44



Powerjet System

Page 46



Turbojet

Page 56



Handyjet

Page 58



Butajet

Page 60



Gardener

Page 62



Grinding wheel dressers

Page 63



DW 3000 hot-air tool & accessories

Page 66



TW 5000 hot-air welding

Page 72

LP gas information

Page 74

Combination chart

Page 76

Spare parts

Page 78

Search index

Page 79

Accessories / POS

Page 81

Selection guide

for LP gas heating tools

The System code

Shows which products that fit together.



Promatic



Pro 86/88



Pro 95



Plastic Welding



Metaljet



Powerjet



Turbojet



Easyjet



The Product code

Shows the features and benefits of the product.



Piezo ignition



Trigger on/off



Bayonet fitting



Anti-flare



Cyclone flame



Precise flame adjustment valve



Light-weight



360° swivel burner



Swivel hose nipple



Precise main flame adjustment valve



Precise pilot flame adjustment valve



Trigger for shifting between pilot and main flame



Precise main flame adjustment valve



Anti-flare

The Application code

Shows the applications for the product.



Precision



Soldering



Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping



Sheet metal



Cyclone flames. The rotating flames wrap around the pipes giving an even heat distribution. Ideal for brazing, soft soldering, plumbing etc.



Pin-point flames. Fine pointed flames with a distinct core. Ideal for fine work on gold, silver, lead etc.



Standard flames. Strong, powerful flames for general soldering and heating.



Power flames. Large powerful, windproof flames for efficient outdoor use. Ideal for roofing, road-working and large scale heating.



Hot-air flames. Powerful windproof hot-air streams. Ideal for paint stripping, heat shrinking, heating of PVC, roofing etc.



Soft flames. Sweeping, powerful flames with visible yellow tip. Ideal for cable work and heat shrinking.



Flat flames. Powerful and windproof wide flame. Ideal for paint stripping, ski waxing etc.

Promatic System

The universal torch system



SAFE

USER FRIENDLY

ERGONOMIC

Promatic is the most complete and advanced system in our range. The patented piezoelectric ignition, universal handle, range of accessories, advanced design and ergonomic appearance make Promatic a world-beating system for all possible heating tasks where efficiency and professional workmanship are the most important requirements.

Promatic - Sievert's top of the line torch system operates with propane and butane gases.



System



Precision



Soldering



Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping



Sheet metal

- Plastic composite handle reinforced with 30% glass fibres for maximum durability
- Double moulded soft grip for highest comfort and usability
- Piezo igniton with instant trigger on/off function
- Bayonet fitting for burners
- Swivelling hose connection to avoid hose drag
- Combined suspension hook and footstand
- Valve for precise flame setting
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-4
Weight, g	290
Length, mm	180
Height, mm	80

Hose connections	
BSP 3/8"LH	336611
M 14x1	336628
UNF 9/16"LH	336617

Sievert Promatic handle 3366



Load relieving trigger system with automatic Piezo ignition.

Trigger on/off function




Swivel hose nipple.

Precise flame adjustment valve



No gas emission unless burner fitted. Bayonet fitted burners.

Ergonomic softgrip handle

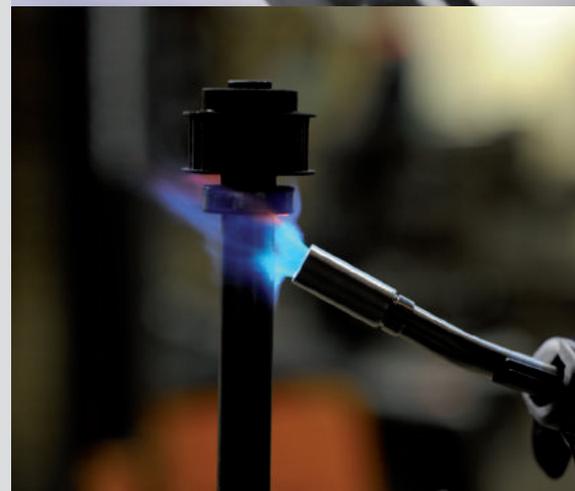

Promatic System

Burners

Soft flame burners for cable shrinking



System



- Soft flame design ideal for cable work and other heat shrinking applications
- Soft flame burners with sweeping, powerful yellow and blue soot-free windproof flames
- Fresh air sucks in and keeps the burner head cold to minimize the risk of burning the shrink material
- To heat the sleeves efficiently but still soft enough not to overheat the shrink material
- Working pressure 2 bar

Soft flame burner no.	334791	334191	334891
Burner diameter Ø, mm	28	38	50
Gas Consumption, g/h at 2 bar	460	900	2 000
Effect, kW	5,9	11,5	26
For thick walled sleeves max, mm Also for thin walled sleeves	50	150	150



Burners for soft soldering, brazing and heating

Pin-point burners



System



- Pin-point burner with the finest flame for precision work such as gold and silver forging
- Silver soldering about 615°C
- Working pressure 2 bar

Pin-point burner no.	333301
Burner diameter Ø, mm	14
Gas Consumption, g/h at 2 bar	55
Effect, kW	0,7
Soft Soldering about 400°C max. pipe diameter Ø, mm	12

Standard burners




System



- Standard burners with brush-type flames for all kinds of soft soldering/small heating applications
- Silver soldering about 615°C
- Working pressure 2 bar

Standard burner no.	334301	334401
Burner diameter Ø, mm	19	25
Gas Consumption, g/h at 2 bar	250	580
Effect, kW	3,2	7,4
Soft Soldering about 400°C max. pipe diameter Ø, mm	32	70

Cyclone burners



System




Promatic



- Cyclone flame burners are the most efficient burners for brazing and soft soldering
- The rotating flame gives an even and all-round heat transfer to the pipe
- Working pressure 2 bar

Cyclone burner no.	334001	333501	333601
Burner diameter Ø, mm	14	19	25
Gas Consumption, g/h at 2 bar	170	250	580
Effect, kW	2,1	3,2	7,4
Soft Soldering about 400°C max. pipe diameter Ø, mm	28	32	70
Brazing up to 720°C max. pipe diameter Ø, mm	15	18	32

Hot-air burners



System



- Hot-air burners with powerful windproof hot-air streams for heat shrinking
- 33499 ideal for shrinking in confined spaces and fibre optic closures
- Working pressure 2 bar

Hot-air burner no.	333401	334990
Burner diameter Ø, mm	38	32x15
Gas Consumption, g/h at 2 bar	125	55
Effect, kW	1,6	0,7

Special burners for PVC and TPO



System



- Hot-air burners with powerful windproof hot-air streams for heating PVC or other rubber membranes where an open flame not is suitable
- Working pressure 2 bar

Hot-air burner no.	335890
Burner diameter Ø, mm	32x15
Gas Consumption, g/h at 2 bar	55
Effect, kW	0,7

Special burners for electronics



System



- Extra small hot-air burner incorporating a heat reflector, ideal for signal systems, traffic lights, alarm systems, marine applications, automobiles and other vehicle repairs
- Working pressure 2 bar

Hot-air burner no.	335990
Burner diameter Ø, mm	25
Gas Consumption, g/h at 2 bar	28
Effect, kW	0,36

Promatic System

Burners

Power burners for waterproofing and other heat demanding works


Power burners



System




- High capacity power burners with extremely strong and windproof flames for roofing works and for large-scale heating applications
- Long burners for field torching
- Recommended working pressure 4 bar

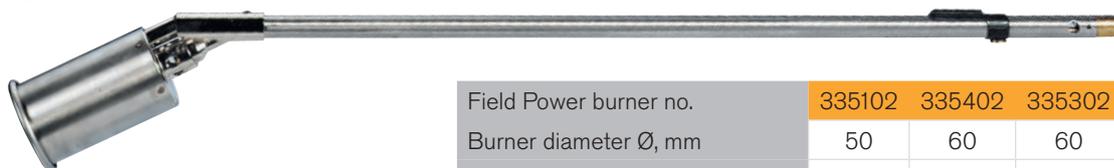


Field Power burner no.	335102	335402	335302
Burner diameter Ø, mm	50	60	60
Gas Consumption, g/h at 4 bar	6 700	8 000	8 000
Effect, kW	86	102	102
Burner length, mm	600	500	600

Power burners, titanium

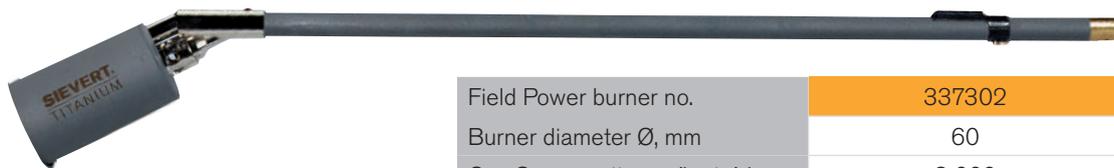

Field Power burner no.	337302
Burner diameter Ø, mm	60
Gas Consumption, g/h at 4 bar	8 000
Effect, kW	102
Burner length, mm	600

Detail power burners

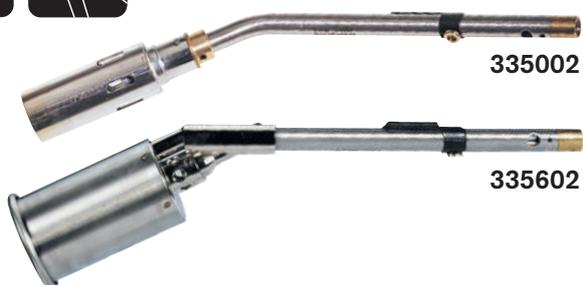

335002

335602

- Short burners for detail work on roofs and other heating applications such as preheating before welding and shrinking on pipelines
- Recommended working pressure 4 bar

Detail Power Burner no.	335002	335602
Burner diameter Ø, mm	40	60
Gas Consumption, g/h at 4 bar	3 350	8 000
Effect, kW	43,5	102
Burner length, mm	250	250



Soldering burners for electronics

Promatic

B



System

B

- Burner with encased and windproof flame for soft soldering.
- Ideal for signal systems, traffic lights, alarm systems, marine applications, automobiles and other vehicle repairs
- Working pressure 2 bar

Soldering burner no.	335991
Soldering tip diameter Ø, mm	10
Gas Consumption, g/h at 2 bar	28
Effect, kW	0,36

Burners for paint stripping



System

B

- Flat flame burner with powerful wide flame for efficient use outdoors for paint stripping and ski-waxing
- Working pressure 2 bar

Flat flame burner no.	334501
Burner diameter, mm	40x8
Gas Consumption, g/h at 2 bar	215
Effect, kW	2,7



Soldering iron burner head



System

B

- Titanium burner head to turn your Promatic handle into a high performance Soldering Iron
- Incorporates an effective windshield that makes the flame totally encased and windproof
- Working pressure 2 bar

Soldering iron no.	700301
Gas Consumption, g/h at 2 bar	140
Effect, kW	1,8
Weight, g	542



Promatic System

Accessories


Copper bit



Made of copper with one pointed and one flat end. For pin-point burner 3333.

Copper bit no.	884301
----------------	--------

Flat nozzle



Flame shaper for hot-air burner 3334.

Flat nozzle no.	716941
-----------------	--------

Neck tube support



Neck tube support / Footstand for burners with long neck tubes.

Neck tube support no.	717241
-----------------------	--------

Tool box



Made of sturdy metal-reinforced plywood. With large handle and locking clasp. 720106: Space for up to 5 burners, 4 m hose, handle, regulator and two disposable cartridges.

Tool box no.	720106
Dimensions:	260x160x350 mm

Soldering mat




For wall and floor protection when soldering. Saves heat and time. For temperatures up to 760°C.

Solder mat no.	415061
Dimensions:	25x25 cm



Tool bags
For more information,
see page 78



Soldering/ Brazing	Heating	Precision	Shrinking	Waterproofing/ Welding	Sheet metal	Paint stripping
						
<p>Cyclone burners for soft soldering and brazing</p> <p>334001 Ø14mm</p> <p>333501 Ø19mm</p> <p>333601 Ø25mm</p>	<p>Burners for soft soldering</p> <p>333301 Ø14mm</p> <p>334301 Ø19mm</p> <p>334401 Ø25mm</p>	<p>Pin-point burner</p> <p>333301 Ø14mm</p> <p>Cyclone burner</p> <p>334001 Ø14mm</p>	<p>Soft flame burners</p> <p>334791 Ø28mm</p> <p>334191 Ø38mm</p> <p>334891 Ø50mm</p> <p>Hot-air burners</p> <p>335990 Ø25mm</p> <p>334990 32x15mm</p> <p>333401 Ø38mm</p>	<p>Power burners</p> <p>335002 Ø40mm</p> <p>335602 Ø60mm</p> <p>335102 Ø50mm</p> <p>335302 Ø60mm</p> <p>337302 Ø60mm</p> <p>Hot-air burners</p> <p>335890 32x15mm</p>	<p>Soldering Irons</p> <p>700301</p> <p>700350 350g</p> <p>700500 500g</p> <p>700400 400g</p> <p>700800 800g</p> <p>700353 Longlife 350g</p> <p>700550 Longlife 500g</p>	<p>Flat flame burner</p> <p>334501 40x8mm</p> <p>Hot-air burners</p> <p>334990 32x15mm</p> <p>333401 Ø38mm</p>

Complete your torch kit

Articles you also need for a complete torch system



 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m hose 8mm 5m and 10m	 Propane hose 5mm 2m, 4m and 10m	 Propane hose 5mm 2m, 4m and 10m
 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, 1-4bar, HFV	 Regulator, fixed, 2bar, HFV	 Regulator, fixed, 2bar, HFV



Hoses

For more information, see page 38



Regulators


For more information, see page 41

Pro 86 System

The classic torch

STABLE FLAME

RELIABLE

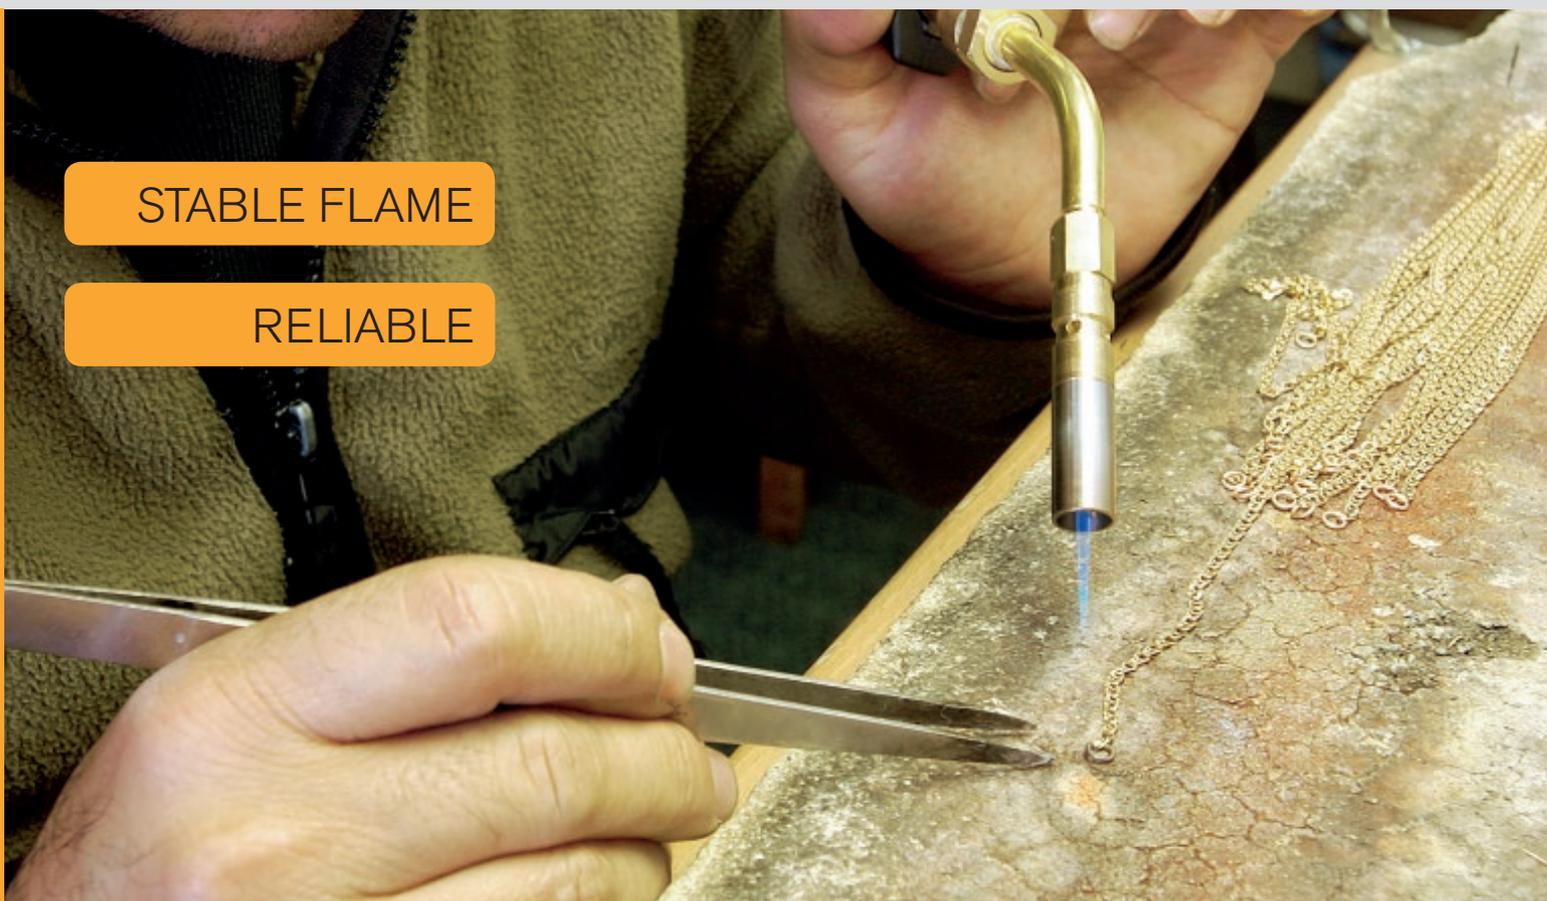

The Pro 86 series meets high criteria for carrying out professional heating tasks. Whether soldering, paint stripping, shrinking or performing gold/silversmith's work, the high quality combined with convenience and a comprehensive range of accessories makes the Pro series a versatile tool for the demanding craftsman.



System



Precision



Soldering



Brazing



Heating



Shrinking



Waterproofing/
Welding



Paint stripping



Sheet metal

- Single valved handle mainly for smaller burners
- The spindle and valve are designed to give a very exact and quick flame setting
- The springloaded metal knob gives a precise and stable setting for the finest of flames
- All metal parts made of high quality brass
- Ergonomically designed plastic composite handle
- Double moulded soft grip for highest comfort and useability
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-8
Weight, g	245
Length, mm	180
Height, mm	70

Hose connections	Art no.
BSP 3/8"LH	348641
M14x1	348642
UNF 9/16"LH	348647

Sievert Pro 86 handle 3486



Exact flame setting

Works in all weather conditions




Wide range of burners for all applications

Two component handle



Sievert Pro 86 torch kit

- A professional and powerful torch kit, ideal for soft soldering, brazing, melting, metalworks, paintstripping and other heating jobs
- Includes handle 3486, necktube 3511, burner 2941 and 2 m fixed hose
- Available with or with out valve 700001



System




Technical data	
Burner diameter Ø, mm	28
Gas Consumption, g/h at 2 bar	600
Effect, kW	7,7
Soft soldering about 400°C max. pipe diameter Ø, mm	60

Hose connections	Art no.
BSP 3/8"LH Fixed hose	219741
BSP 3/8"LH no valve	219742

Pro 86 System

Burners and neck tubes


Sievert Pro neck tubes

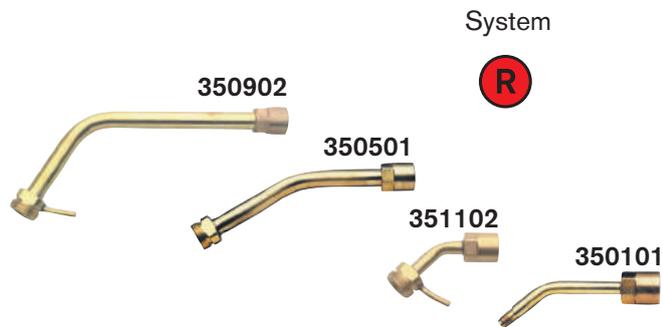

- Neck tubes made of high quality brass
- Shorter neck tubes are recommended for smaller heating applications like gold and silver forging

Neck tube no.	Length, mm
350902 with hook	180
350501	100
351102 with hook	70
350101 only for burner 8842	78


Soft flame burners

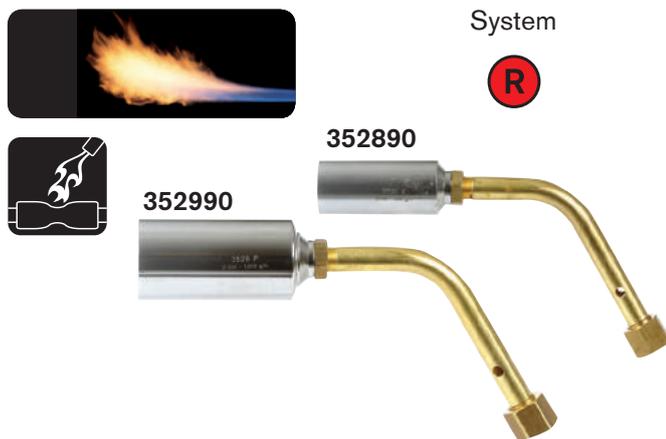

- Soft flame design ideal for cable work and other heat shrinking applications
- Soft flame burners with sweeping, powerful yellow and blue soot-free windproof flames
- Fresh air sucks in and keeps the burner head cold to minimize the risk of burning the shrink material
- To heat the sleeves efficiently but still soft enough not to overheat the shrink material
- For direct connection to Sievert Pro handles
- Working pressure 2 bar

Soft flame burner no.	352890	352990
Burner diameter Ø, mm	28	38
Gas Consumption, g/h at 2 bar	900	1 200
Effect, kW	11,3	15

Pin-point burners

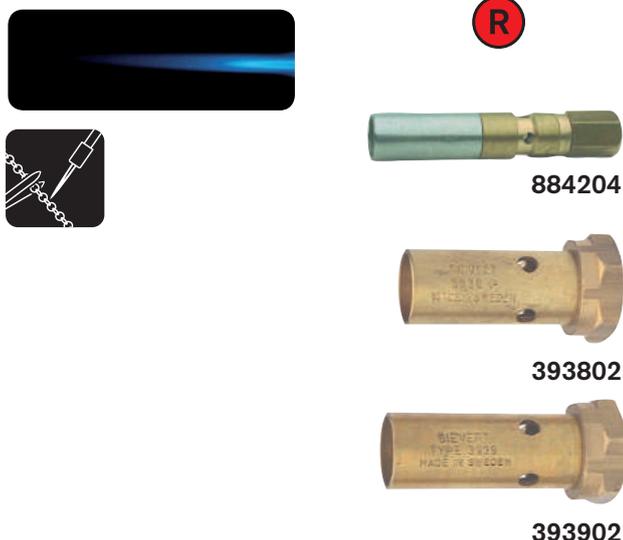


- Pin-point burners with the finest flames for precision work such as gold and silver forging
- Silver soldering about 615°C
- For connection to Sievert Pro necktubes, 8842 only for necktube 3501
- Recommended working pressure 2 bar

Pin-point burner no.	884204	393802	393902
Burner diameter Ø, mm	8	17	17
Gas Consumption, g/h at 2 bar	20	20	70
Effect, kW	0,25	0,25	0,9
Soft Soldering about 400°C max. pipe diameter Ø, mm	8	10	12



Standard burners



System



394002



394102



294102


Pro 86



- Standard burners with brush-type flames for all kinds of soft soldering/small heating applications
- Silver soldering about 615°C
- For connection to Sievert Pro necktubes
- Recommended working pressure 2 bar

Standard burner no.	394002	394102	294102
Burner diameter Ø, mm	17	22	28
Gas Consumption, g/h at 2 bar	90	240	600
Effect, kW	1,2	3,1	7,7
Soft Soldering about 400°C max. pipe diameter Ø, mm	12	40	60

Cyclone burners



System



352403




352503

- Cyclone flame burners are the most efficient burners for brazing and soft soldering
- The rotating flame gives an even and all-round heat transfer to the pipe
- For direct connection to Sievert Pro handles
- Working pressure 2 bar

Cyclone burner no.	352403	352503
Burner diameter Ø, mm	19	25
Gas Consumption, g/h at 2 bar	240	800
Effect, kW	3,1	10,3
Soft Soldering about 400°C max. pipe diameter Ø, mm	50	70
Brazing up to 720°C max. pipe diameter Ø, mm	18	32

Special burners

Burners for paint stripping




System



- Flat, wide, extremely windproof and powerful flame for paint stripping
- For direct connection to Sievert Pro handles
- Recommended working pressure 2 bar

Flat flame burner no.	351703
Burner diameter, mm	35x5
Gas Consumption, g/h at 2 bar	210
Effect, kW	2,7

Soldering iron burner head



System



708121

295501

- Burner head to turn your Pro 86 handle into a high performance Soldering Iron for sheet metal work
- Windshield and burner designed to give excellent wind protection
- Working pressure 2 bar

Soldering burner no.	295501
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3
Wind shield no.	708121

Complete Soldering Iron assortment, see page 32

Pro 86 System

Light Line



▪ Value for money burner assortment for Pro 86

Neck tube



▪ Neck tube to connect light line burner to the Pro 86 handle

Neck tube no.	Length, mm
350101	78

Pin-point burners



884204




872001

▪ Pin-point burners with the finest flames for precision work such as gold and silver forging ▪ Silver soldering about 615°C ▪ Recommended working pressure 2 bar

Pin-point burner no.	884204	872001
Gas consumption g/h at 2 bar	20	60
Max pipe diameter Ø, mm	8	10
Effect in kW	0,25	0,75


Standard burner



▪ Standard burners with brush-type flames for all kinds of soft soldering/small heating applications ▪ Silver soldering about 615°C ▪ Recommended working pressure 2 bar

Standard burner no.	871901
Gas consumption g/h at 2 bar	160
Soft soldering 400°C, Max pipe diameter Ø, mm	22
Brazing up to 720°C, Max pipe diameter Ø, mm	12
Effect in kW	2

Power burner



▪ Heavy duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions ▪ Ideal for several different heat demanding applications ▪ Recommended working pressure 2 bar

Standard burner no.	872501
Gas consumption g/h at 2 bar	550
Soft soldering 400°C, Max pipe diameter Ø, mm	40
Brazing up to 720°C, Max pipe diameter Ø, mm	18
Effect in kW	7

Burners for paint stripping



▪ Flat, wide, extremely windproof and powerful flame for paint stripping ▪ Recommended working pressure 2 bar

Flat burner no.	872304
Gas consumption g/h at 2 bar	230
Effect in kW	3



Soldering/ Brazing	Heating	Precision	Shrinking	Waterproofing/ Welding	Sheet metal	Paint stripping
 <p>Cyclone burners for soft soldering and brazing</p> <ul style="list-style-type: none"> 352403 Ø19mm 352503 Ø25mm 350101 871901 Ø17mm 872501 Ø25mm 	 <p>Burners for soft soldering</p> <ul style="list-style-type: none"> 351102 350902 393802 Ø17mm 393902 Ø17mm 394002 Ø17mm 394102 Ø22mm 	 <p>Pin-point burner</p> <ul style="list-style-type: none"> 350101 884204 Ø8mm 872001 Ø12mm  <p>Burners for soft soldering</p> <ul style="list-style-type: none"> 351102 393802 Ø17mm 393902 Ø17mm 394002 Ø17mm 	 <p>Soft flame burners</p> <ul style="list-style-type: none"> 352890 Ø28mm 352990 Ø38mm 		 <p>Soldering Irons</p> <ul style="list-style-type: none"> 349241 701633 Longlife 701725 Longlife 701800 256200 701630 707120 702070 	 <p>Flat flame burner</p> <ul style="list-style-type: none"> 351703 35x5mm 350101 884204

Complete your torch kit


Articles you also need for a complete torch system



348641
BSP 3/8"LH
348642
M14X1



 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>		 <p>Propane hose 5mm 2m, 4m and 10m</p>	 <p>Propane hose 5mm 2m, 4m and 10m</p>
 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>		 <p>Regulator, fixed, 2bar, HFV</p>	 <p>Regulator, fixed, 2bar, HFV</p>

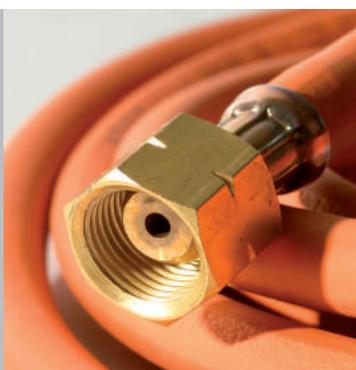

Hoses

For more information, see page 38



Regulators

For more information, see page 41

Pro 88 System

Heavy-duty torch



HEATING POWER

PERFORMANCE

The Pro 88 series is used all over the world by professional roofers and waterproofing specialists. With a complete power burner programme, including Titanium torches, the Pro 88 is the ultimate torch system for heavy-duty works.

The Pro 88 series operates with propane and butane gases.



System



Precision

Soldering

Brazing

Heating

Shrinking

Waterproofing/
Welding

Paint stripping

Sheet metal

- Double valved handle mainly for larger burners
- Incorporates one main valve and one economizer valve enabling a gas saving pilot flame
- Trigger for instant shifting between pilot and main flame and for pulsing the main flame
- All metal parts made of high quality brass
- Ergonomically designed plastic composite handle
- Double moulded soft grip for highest comfort and useability
- Delivered without hose nipple



Technical data	
Working pressure, bar	1,5-8
Weight, g	385
Length, mm	205
Height, mm	90

Hose connections	
BSP 3/8"LH	Art no. 348841
BSP 3/8"LH <i>preset pilot flame</i>	348875
M14x1	348842
UNF 9/16"LH	348847

Sievert Pro 88 handle 3488



Trigger for shifting between pilot and main flame and for pulsing the main flame



Precise flame adjustment of pilot and main flame

Pilot flame for gas saving

Double valved handle mainly for larger burners




Wide range of burners for power applications

Works in all weather conditions



Sievert has a wide range of titanium burners and necktubes

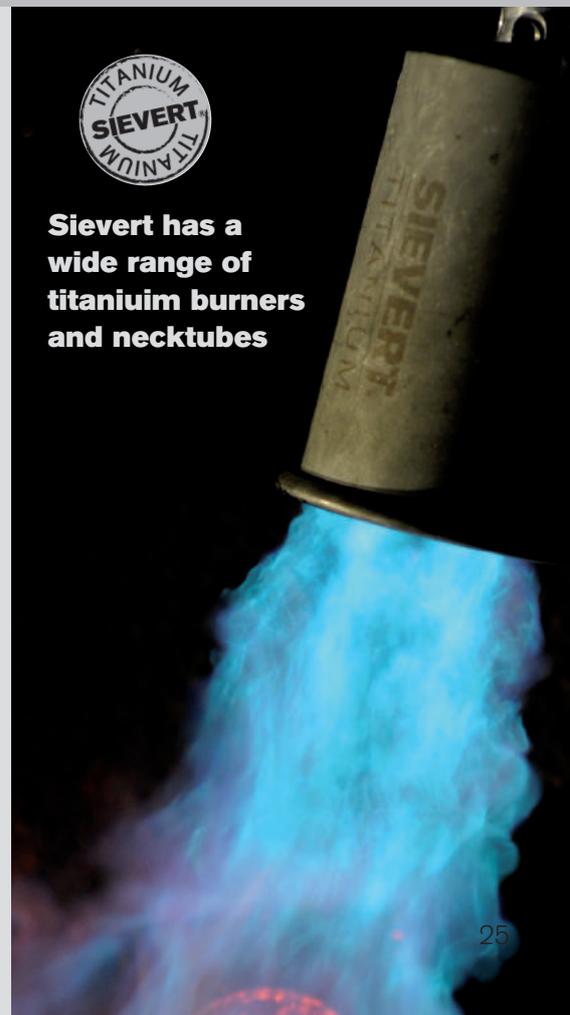


Pro 88 System

Burners and neck tubes

Sievert Pro neck tubes

System

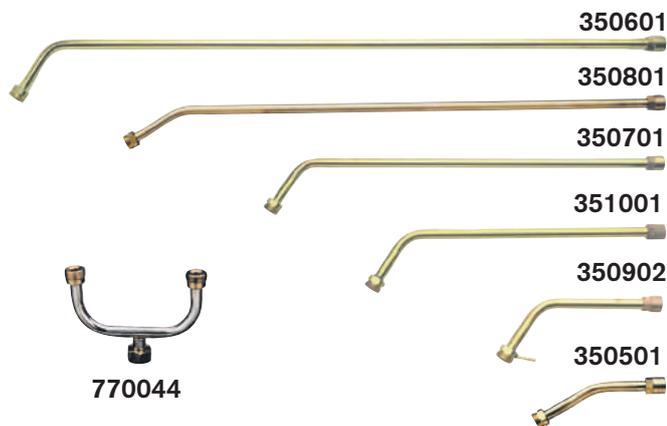

350601

350801

350701

351001

350902

350501

770044

▪ Wide range of neck tubes made of high quality brass ▪ Double neck tube 770044, made of stainless steel, makes it possible to connect two burners to one neck tube ▪ Shorter neck tubes like 3505 and 3509 are recommended for smaller heating applications like gold and silver forging ▪ Longer neck tubes like 3506, 3507, 3508, 3510 are recommended for larger jobs like roofing and road-work

Neck tube no.	Length, mm
350601	750
350801	600
350701	500
351001	350
350902 with hook	180
350501	100
770044 double neck tube	

Power burners for waterproofing and other heat demanding works



System



294202

294302

294402

▪ Heavy-duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions ▪ Ideal for drying, bitumen laying, detail and field torching, preheating before welding, melting snow/ice and other heat demanding applications ▪ For connection to Sievert Pro necktubes ▪ Recommended working pressure 4 bar

Power burner no.	294202	294302	294402
Burner diameter Ø, mm	32	35	50
Gas Consumption, g/h at 4 bar	2 000	3 350	6 700
Effect, kW	26	43,5	86

Made of high quality brass



293401

296001

Power burner no.	293401	296001
Burner diameter Ø, mm	34	60
Gas Consumption, g/h at 4 bar	2 000	8 250
Effect, kW	26	114

Made of high quality stainless steel



Power burner torch kits

Pro 88



System



Burner kit no.	345000
Burner diameter Ø, mm	50
Gas Consumption, g/h at 4 bar	6 700
Effect, kW	86

Swivel hose nipple for 5 to 8 mm hose



Technical data	
Burner diameter Ø, mm	50
Gas Consumption, g/h at 4 bar	6 700
Effect, kW	86
Neck tube length, mm	180

Hose connections	Art no.
BSP 3/8"LH	344441
M14x1	344442
UNF 9/16"LH	344447



Technical data	
Burner diameter Ø, mm	60
Gas Consumption, g/h at 4 bar	8 250
Effect, kW	114
Neck tube length, mm	500

Hose connections	Art no.
BSP 3/8"LH	346041
M14x1	346042
UNF 9/16"LH	346047

Special heavy-duty torch 6250



Torch no.	625010	625020
Burner diameter Ø, mm	56	51
Gas Consumption, g/h at 4 bar	4 800	4 800
Effect, kW	57	57
Neck tube length, mm	400	1460

Hose connection BSP 3/8"LH




Pro 88 System

Titanium range

Save Your body

Working long days in tough conditions requires tools that are easy to handle and that prevent state of exhaustion. Sievert Titanium torches are the most ergonomic roofing burners ever created. With weight reduced by 60% compared to traditional burners, they will dramatically reduce the load on your body when working continuously for hours, days and months.

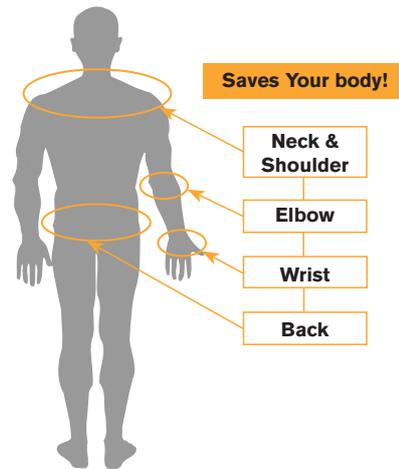

Titanium power burners and kits

Power burners



System



- Heavy-duty light weight power burners with extremely strong and windproof flames to withstand the severest weather conditions
- Ideal for drying, bitumen laying, detail and field torching, preheating before welding, melting snow/ice and other heat demanding applications
- For connection to Sievert Pro neck-tubes
- Recommended working pressure 4 bar



Power burner no.	295101	295001	295301	295401	295402
Burner diameter Ø, mm	34	50	60	70	70
Gas Consumption, g/h at 4 bar	2 000	6 700	8 250	12500	12500
Effect, kW	26	86	114	155	155

Made of high quality titanium

Neck tubes, titanium

System



- Range of neck tubes made of high quality titanium to connect power burners



Titanium neck tube no.	355501	355001	355701	355601
Neck tube length, mm	100	350	500	750

Power burner kits

System

Pro 88



- Wide range of power burner kits for quick and simple connection to Pro 88



Titanium kit no.	356301	356401	356101	356701	356501	356001	357001	357002	356601	356201
Neck tube length, mm	100	100	350	350	500	500	500	500	600	750
Burner width, mm	34	50	50	60	50	60	70	70	50	50
Gas consumption, g/h at 4 bar	2 000	6 700	6 700	8 250	6 700	8 250	12 500	12 500	6 700	6 700
Effect, kW	26	86	86	114	86	114	155	155	86	86

Power burner torch kits

System

- Complete torch kits with fixed power burners and footstand




Power burner no.	346051	346052	347051	347052
Burner diameter Ø, mm	60	50	70	70
Gas Consumption, g/h at 4 bar	8250	6700	12500	12500
Effect, kW	114	86	155	155
Neck tube length, mm	500	500	500	500



Pro 88 System

Hot-air burners

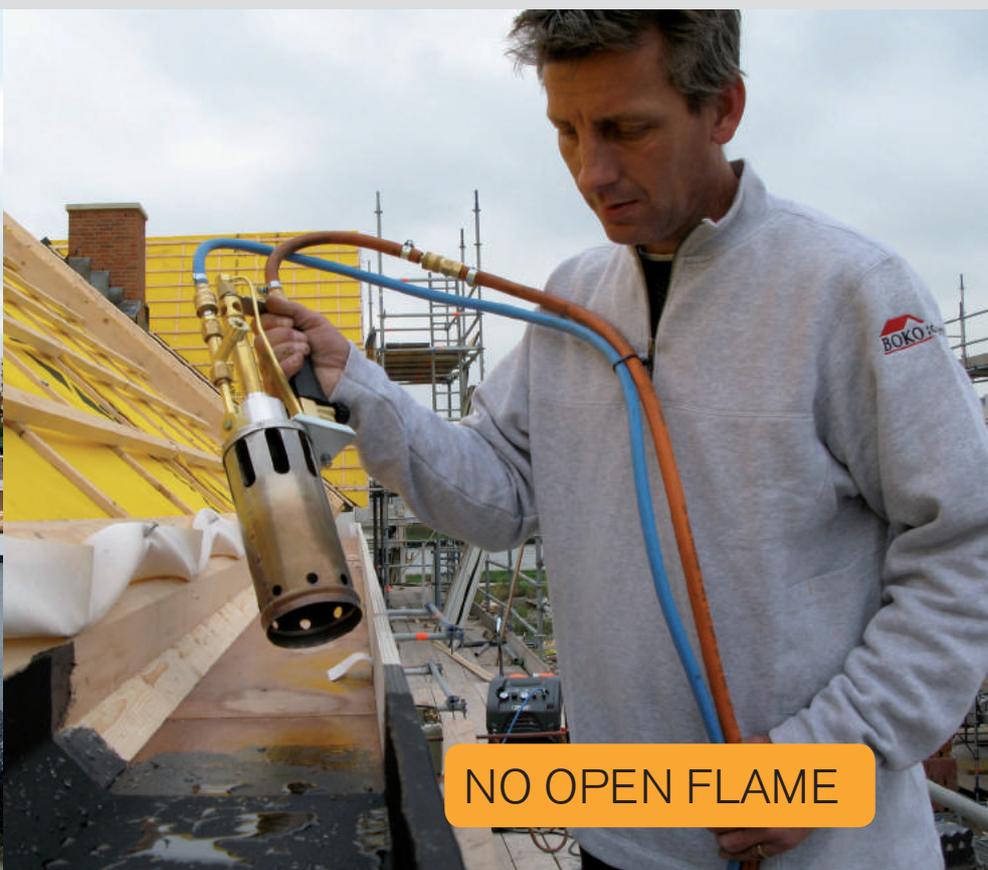

Hot-air burners for roofing work



System



298101

- Powerful hot-air roofing burners with totally encased flames for efficient bitumen laying when open flames are not permitted
- Powerful enough to achieve the same speed of roof laying compared to open flames - and the gas consumption is much lower
- The use of heat is very efficient due to the narrow and directed hot-air stream and due to the fact that one can work even closer to the material
- All burners can use compressed air to increase power for welding and for quick and efficient drying
- Working pressure 2 and 4 bar

With lifting device. Hot-air directed obliquely under overlap. Supplied with 3488 handle.

Delivered fully prepared for compressed air.



298601




298201

Technical data	298101	298201	298601
Burner width, cm	8	22	16
Gas Consumption, kg/h at 2 bar	1,1	2,2	1,1
4 bar with compressed air	1,8	3,6	1,8
Effect at 2 bar, kW	15	30	15
Effect at 4 bar, kW	25	50	25
Connection	BSP 3/8" LH	BSP 3/8" LH	BSP 3/8" LH

Turboset no. **717271**

Allows the use of compressed air to increase the power of hot-air burners 2981 and 2986.



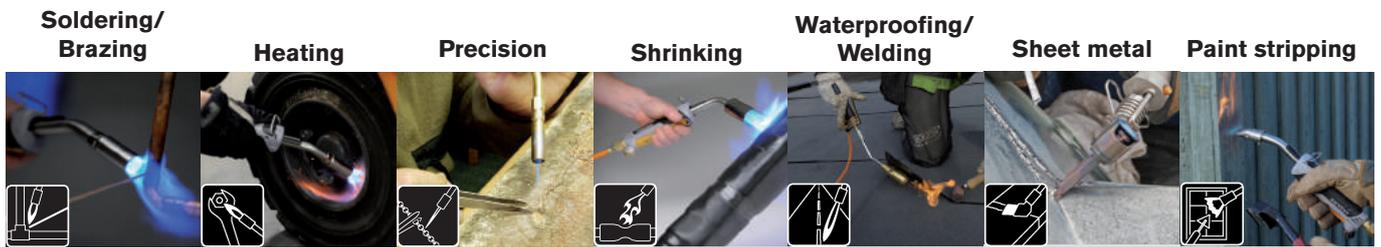

Soft flame burners



Power burners



Hot-air burners




Complete your torch kit

Articles you also need for a complete torch system



348841
BSP 3/8" LH
348842
M14X1

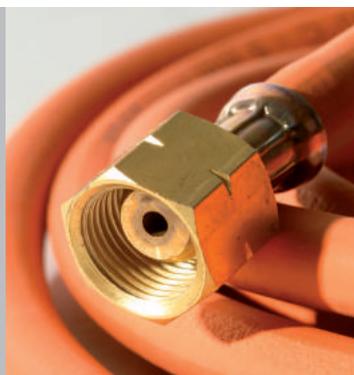

Hoses

For more information, see page 38



Regulators

For more information, see page 41

Soldering Iron System

Wide range of unique solutions



FLEXIBLE

INNOVATIVE

WIDE RANGE

PSI 3380

System

B



Sheet metal



Pro 95

System

K



Pro 3492

System

R



Promatic

System

B





System



Works 60 to 90 minutes with one 60g cartridge!

- Portable soldering iron for sheet metal work made of high quality Titanium and aluminium
- Ergonomically designed handle for even greater comfort
- Automatic piezo ignition
- The burner incorporates an effective windshield that makes the flame totally encased and windproof
- No risk of burning sensitive material
- The precise valve in the handle makes it easy to obtain the right heat for the copper bit
- Copper bit included

PSI	338030
Gas Consumption, g/h at 2 bar	75
Effect, kW	0,9
Length, mm	230
Weight, g	810
Copper bit weight, g	250

Portable soldering iron kit	338093
-----------------------------	--------

Delivered in a box with ▪ 1 PSI 338030 ▪ 2 cartridges Ultragas 220283 ▪ 1 Copper bit 700250 (250g) ▪ 2 jet orifices.

PSI (Portable Soldering Iron)

Ergonomically designed handle

Simple one-hand operation



Light-weight design

Made of high quality titanium and aluminium



Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	700245	700250
Weight, g	245	250

Replacement cartridges

- Ultragas 220283 is a special gas mixture comprising Propane, Butane, Acetone and Propene. It achieves a flame temperature of more than 2100°C!

Technical data	220283
Connection	EU 7/16"
Content, ml	210

Anti-flare!



Soldering Iron System

Wide range of unique solutions

Promatic soldering iron 3370



System



- Soldering iron burner for sheet metal work made of high quality Titanium
- Ergonomically designed handle for even greater comfort
- Automatic piezo ignition
- The burner incorporates an effective windshield that makes the flame totally encased and windproof
- No risk of burning sensitive material
- Equipped with locking device to keep the flame burning
- The precise valve in the handle makes it easy to obtain the right heat for the copper bit
- Working pressure 2 bar

Technical data	
Gas Consumption, g/h at 2 bar	140
Effect, kW	1,8
Length, mm	290
Weight, g	832

Delivered without copper bit

Hose connections	Art No
BSP 3/8"LH	337030
UNF 9/16"LH	337037



Totally encased and windproof burner

Wide range of copper bits



Swivel hose nipple.

Precise flame adjustment valve

Complete soldering iron kit



Promatic soldering kit	337093
------------------------	--------

Portable soldering kit with 2 disposable Propane cartridges (6 working hours).

Contains:

- Promatic Soldering Iron with 350 g copper bit
- 2 cartridges of quality propane 430 g, 220883
- Adjustable regulator 265012
- 2 m hose Ø5 mm, 717321
- Hook for Belt 884105
- Bottle for soldering flux, 757208
- Small brush for soldering flux 757200
- Stone ammoniacal 757206
- Black wooden box 720106

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	700350	700400	700500	700800
Weight, g	350	370	500	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

1500 metres of soldering, No hammering, No filing!



Copper bit no.	700353	700550
Weight, g	350	500

Soldering iron Pro 95 Titanium

Soldering Irons

K



System

K



- Extra light-weight soldering iron combining classic design, maximum comfort with modern burner technology
- Large selection of copper bits for all kinds of sheet metal work including roofing & gutter soldering
- The Pro 95 burner guarantees wind stability without using a windshield
- The handle has sliding air control to enable hard or soft setting
- It is also equipped with a swivel hose connection to avoid hose twist

Technical data

Gas Consumption, g/h at 2 bar	120
Effect, kW	1,5
Length, mm	250
Weight, g	299

Hose connections

BSP 3/8"LH	Art no.
	770360




Extrem light-weight design

Made of high quality titanium



Sliding air control to enable hard or soft setting

Accessories

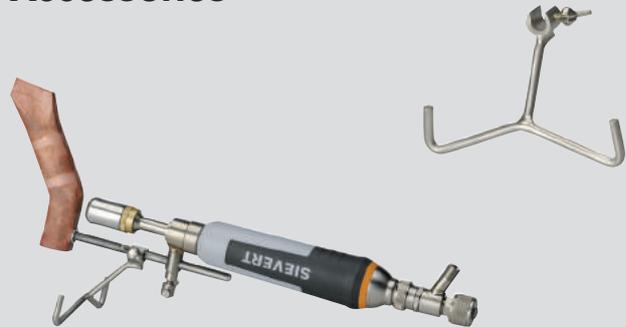

Footstand no.

770303

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	701630	701720	702070	701800
Weight, g	300	500	380	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

**1500 metres of soldering,
No hammering,
No filing!**



Copper bit no.	701633	701725
Weight, g	300	500

Soldering Iron System

Wide range of unique solutions

Soldering iron Pro 3492



System




- Traditional soldering iron burner for sheet metal work
- Practical and sturdy design
- Supplied with windshield and burner designed to give excellent wind protection
- Working pressure 2 bar
- Delivered without copper bit



Technical data	
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3

Hose connections	Art no.
BSP 3/8"LH	349241
M14x1	349242



Practical and sturdy design

Precise flame adjustment



Accessories



Soldering burner no.	295501
Gas Consumption, g/h at 2 bar	260
Effect, kW	3,3



Wind shield no.	708121
-----------------	--------

Copper bits

- Cold-hammered copper bits made of high-quality electrolytic copper



Copper bit no.	701630	701720	702070	256200	701800
Weight, g	300	500	380	800	800

Long life copper bits

- Long Life Copper bits solder at least 1500 metres and provide maximal heating transfer. Low gas consumption, no salmiak stone needed for cleaning

1500 metres of soldering, No hammering, No filing!



Copper bit no.	701633	701725
Weight, g	300	500

Soldering Iron System

Application guide

SIEVERT®

Soldering Irons

PSI



Soldering Irons

- 700245
245g
- 700250
250g

Promatic 3370



Soldering Irons

- 700350
350g
- 700500
500g
- 700400
370g
- 700800
800g
- Longlife 700353
350g
- Longlife 700550
500g

Pro 95



Soldering Irons

- 701630
300g
- 701720
500g
- 702070
380g
- 256200
800g
- 701800
800g
- 701633
Longlife
300g
- 701725
Longlife
500g

Pro 3492



Soldering Irons

- 701630
300g
- 701720
500g
- 702070
380g
- 256200
800g
- 701800
800g
- 701633
Longlife
300g
- 701725
Longlife
500g

Complete your soldering iron kit

Articles you also need for a complete torch system

Replacement
gas cartridge
Ultragas 220283



Propane
hose **5mm**
2m, 4m and 10m



Propane
hose **5mm**
2m, 4m and 10m



Propane
hose **5mm**
2m, 4m and 10m



Regulator with
adjustable pressure
For gas cartridge



Regulator, fixed,
2bar, HFV



Regulator with
adjustable pressure
For gas cartridge



Regulator, fixed,
2bar, HFV



Regulator with
adjustable pressure
For gas cartridge



Regulator, fixed,
2bar, HFV

Soldering iron kit solutions



Propane hoses and accessories

Wide range of hoses



3 LAYERS FOR SAFETY

Sievert high pressure hoses conform to the EN 559/ISO 3821 standards. Sievert hoses are also extra frost resistant and can be used in temperatures down to -30°C. The Sievert hose is designed with an inner layer of black gas resistant rubber, a middle layer of reinforcing weave to withstand high pressure and an outer orange coloured layer to protect against external damage, sunlight and ozone.

Sievert hoses are available with inside diameters of 5 mm, 6,3mm and 8 mm in 50 meter rolls or as factory fitted and leak tested hose kits.

Propane hoses

Diameter 5 mm
EN 559 / ISO 3821

Propane hose no.	Hose connection	Handle connection	Connection type	Length, m
853090	-			50 metre roll
717321	BSP 3/8"LH	BSP 3/8"LH	Fixed	2
717341	BSP 3/8"LH	BSP 3/8"LH	Fixed	4
717431	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
701501	BSP 3/8"LH	M14x1	Fixed	2
701291	BSP 3/8"LH	M14x1	Fixed	4
701261	BSP 3/8"LH	M14x1	Fixed	10
717320	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	2
701294	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	4
701505	BSP 3/8"LH	M14x1	Fixed / Swivel	2
701290	BSP 3/8"LH	M14x1	Fixed / Swivel	4

Propane hoses for large burners

Extra resistant
Diameter 6,3 mm
DIN 4815 6,3 mm

Propane hose no.	Connections	Handle connection	Connection type	Length, m
770037	BSP 3/8"LH	BSP 3/8"LH	Fixed	5
770039	BSP 3/8"LH	BSP 3/8"LH	Fixed	8
770038	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
770015	BSP 3/8"LH	BSP 3/8"LH	Fixed	20

Flexible
Diameter 8 mm
EN 559 / ISO 3821

836990	-			50 metre roll
701295	BSP 3/8"LH	BSP 3/8"LH	Fixed	5
711511	BSP 3/8"LH	BSP 3/8"LH	Fixed	10
701510	BSP 3/8"LH	BSP 3/8"LH	Fixed / Swivel	10
711510	BSP 3/8"LH	M14x1	Fixed / Swivel	10

Quick connections



Gas quick connection according to EN 561, ISO 7289

- Double O-ring sealing
- Gas cut-off



Threads:

In accordance with EN 560, ISO 3253 or country specific connections: 3/8"LH

Art no.	Description	Connection	Weight, g	Dimension, mm
754213	Quick connection OT	G3/8" LH OT	77,3	53x21
754214	Coupling pin IT	G3/8" LH IT	41,8	47x21
754215	Quick connection IT	G3/8" LH IT	86,4	52x21
754216	Coupling pin OT	G3/8" LH OT	29,3	47,5x15

OT=Outside thread IT=Inside thread

Hose nipples Fixed

Hose nipple no.	709621	709180	708971	717000	717020
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Shell	POL
Inside hose Ø, mm	5	5 and 8	5 and 8	5 and 8	5 and 8



Hose nipples Swivel

Hose nipple no.	722001	717331	715161	Hose clip no.	901359	900477
Thread	BSP 3/8"LH	BSP 3/8"LH	M14x1	Inside hose Ø, mm	5	8 adjustable
Inside hose Ø, mm	5	5 and 8	5 and 8			



Connections



Connections no.	Description
754206	Quick Connection female, BSP 3/8"LH for hose
754210	Nipple for Quick Connection male, BSP 3/8"LH for handle
770512	Double nipple, BSP 3/8"LH x BSP 3/8"LH for hose
770067	Connection for connecting two hoses, DIN Kombi
770082	Hose for 770067, length 40 cm, DIN Kombi

Valve



Valve no.	Description
700001	Valve adaptor M14-1,5 / BSP 3/8"LH. Horizontal outlet, convenient swivel connection.

Regulators

Hose failure valves

EXTRA SAFETY

STEADY PRESSURE



Sievert regulators are manufactured in brass to ensure the highest quality and long service life. The valves have a very high capacity and precise outlet pressure.

Why use a regulator?


Certain Pro 86/88 burners, such as cyclone burners and most Promatic burners, require a steady pressure of 2 bar in order to perform well. Other burners can also operate under higher pressures but it is still an advantage to reduce the pressure from the propane cylinder. The advantage is that the pressure can be stabilized to obtain the same pressure on a warm summer's day as on a cold winter's day. The diagram shows how the pressure in an LP-gas cylinder varies with temperature. If the gas output is high, the gas cylinder will be cooled down and the pressure will drop.

Why use a hose failure valve?

A hose failure valve improves safety by **cutting off the gas flow in case of a hose rupture or some other major gas leak**. The use of hose failure valves is especially recommended on long hoses. The hose connection rotate freely on the valve housing, which reduces the risk of the hose becoming entangled. Sievert hose failure valves are supplied separately (3054) or integrated in regulators (3063, 3083, 3092 and 3093).

Why use LTS?

The Leak Test System improves safety even further. The **LTS valve is designed to detect minor leaks**. Before starting work, the operator can check for leaks in the system with the LTS valve. Their use is especially **recommended in poorly ventilated premises and when working below ground**. A regulator with LTS is always combined with a hose failure valve, to take care of the risk from major leaks.

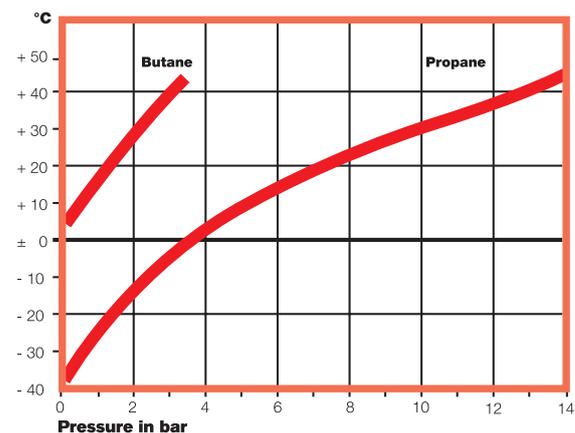

Connections Guide

Commercial name	POL	BSP	Italian	DIN-Kombi	Shell
Thread	0.88"-14NGO	3/8"LH	W20.0-14LH	W21.8-14LH	W21.8-14LH
Standard	G.9	G.25	G.1	G.5	-
Country	CZ, DE, NO, PL, PT, SE	DE	AT, GR, IT	AT, DE, PL, HU	FR
					

Regulators & hose failure valves

Regulators

Regulators with fixed pressure



Regulator no.	Connection	Hose connexion	Pressure	Max. Capacity
309121	POL	BSP 3/8"LH	2 bar	6 kg/h
309122	BSP 3/8"LH	BSP 3/8"LH	2 bar	6 kg/h
309124	Italian	BSP 3/8"LH	2 bar	6 kg/h
309129	Shell	BSP 3/8"LH	2 bar	6 kg/h
309175	DIN Kombi	BSP 3/8"LH	2 bar	6 kg/h

Regulators with fixed pressure and hose failure valve



With hose failure valve	Connection	Hose connexion	Pressure	Max. Capacity
309221	POL	BSP 3/8"LH	2 bar	4 kg/h
309222	BSP 3/8"LH	BSP 3/8"LH	2 bar	4 kg/h
309225	DIN Kombi	BSP 3/8"LH	2 bar	4 kg/h
309345	DIN Kombi	BSP 3/8"LH	4 bar	12 kg/h
309229	Shell	BSP 3/8"LH	2 bar	4 kg/h
309399	Shell	BSP 3/8"LH	4 bar	12 kg/h

Regulators with adjustable pressure



Regulator no.	Connection	Hose connexion	Pressure	Max. Capacity
306111	POL	BSP 3/8"LH	1-4 bar	5-20 kg/h
306112	BSP 3/8"LH	BSP 3/8"LH	1-4 bar	5-20 kg/h
306115	DIN Kombi	BSP 3/8"LH	1-4 bar	5-20 kg/h
306119	Shell	BSP 3/8"LH	1-4 bar	5-20 kg/h
With manometer	Connection			
308111	POL	BSP 3/8"LH	1-4 bar	5-20 kg/h
308115	DIN Kombi	BSP 3/8"LH	1-4 bar	5-20 kg/h

Regulators with adjustable pressure and hose failure valve



With hose failure valve	Connection			
306311	POL	BSP 3/8"LH	1-4 bar	5-12 kg/h
306312	BSP 3/8"LH	BSP 3/8"LH	1-4 bar	5-12 kg/h
306314	Italian	BSP 3/8"LH	1-4 bar	5-12 kg/h
306315	DIN Kombi	BSP 3/8"LH	1-4 bar	5-12 kg/h
306319	Shell	BSP 3/8"LH	1-4 bar	5-12 kg/h
With manometer	Connection			
308311	POL	BSP 3/8"LH	1-4 bar	5-12 kg/h
308315	DIN Kombi	BSP 3/8"LH	1-4 bar	5-12 kg/h

Regulators with adjustable pressure, HFV and LTS

With leak test system	Connection			
306961	POL	BSP 3/8"LH	1-4 bar	1-2,3 kg/h
306962	BSP 3/8"LH	BSP 3/8"LH	1-4 bar	1-2,3 kg/h

Regulators with adjustable pressure for cartridges



Regulator no.	Connection	Hose connexion	Pressure	Max. Capacity
265012	EU 7/16" cartridge	BSP 3/8"LH	0-2 bar	-
265033	US 1" cylinder	BSP 3/8"LH	0-2 bar	-

Hose failure valves

With convenient swivelling angled connection.



HFV no.	Connection	Hose connexion	Pressure	Max. Capacity
305401	POL	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
305406	BSP 3/8"LH	BSP 3/8"LH	Low 1,5-4 bar	3,8-5,7 kg/h
305402	BSP 3/8"LH	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
305404	Italian	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
305405	DIN Kombi	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
305409	Shell	BSP 3/8"LH	High 1,5-4 bar	10-14 kg/h
645000	POL, hose nipple 5-8 mm		Appr. 7 bar	14 kg/h

Manometer



Manometer
720730

For 3061, 3063, 3081 and 3083

Refillable cylinders

ECONOMICAL

ENVIRONMENT FRIENDLY



- Manufactured of high quality steel, treated with corrosion protection and durable varnish on the outside
- Fitted with self closing connecting valves and integrated safety valve
- All cylinders are empty



Article no.	200041	201251	200009	201218	200426	201318	200417
Connection	M14 x1,5	M14 x1,5	M14 x1,5	M14 x1,5	BSP 3/8 LH	Shell	BSP 3/8 LH
Total weight (kg)	1,2	5,7	1,2	5,7	1,72	6,3	3,3
Contents (kg)	0,34	2,0	0,34	2,0	0,42	2,0	0,45
Height (cm)	28	22	28	22	30	28	36
Safety valve	External	External	In valve	In valve	In valve	In valve	In valve

Accessories



Hose holder no. **717031**
 Hose holder for cylinder 2012. A neat and practical solution for carrying and storing a torch kit and hose.



Suspension and carrying hook no. **884104/884105**
 884104: For use with the 2000, 2004 cylinder.
 884105: For use with regulator 265012/265033.

Light line



Full range of burners, see page 22

Valve no. **871601**

Combined valve and neck tube assembly. For use with the refillable cylinder 2000.



Valve no. **881647**

Complete torch with US connection. For use with disposable cylinder 2209 and 2211

Refillable cylinders



Refill connections and accessories for refillable LP gas cylinders



Refill connection no. **203902**

Thread: POL / M14x1,5 for cylinder 2000 and 2012



Refill connection no. **204402/204403**

204402 Thread: Shell / M14x1,5 for cylinder 2000 and 2012
204403 Thread: DIN Kombi / M14x1,5 for cylinder 2000 and 2012



Refill connection no. **702621**

Thread: POL / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **702871**

Thread: Shell / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **757007**

Thread: DIN Kombi / BSP 3/8"LH for cylinder 2004 and 3960



Refill connection no. **770327**

Thread: DIN Household / BSP 3/8"LH for cylinder 2004 and 3960



Art no 720740 Art no 700001 Art no 769200

Adaptor no. **720740/700001/769200**

720740: Adaptor for connecting POL regulator to valve - 700001. Threads - M14x1,5 / BSP 3/8"LH. - 769200: Adaptor POL / DIN Kombi and Shell.



Cylinder valve no. **770326**

BSP 3/8"LH for cylinder 2004.

Cylinder trolley no. **730470**

With rubber wheels. Including nylon strap.

Gases

Disposable cartridges



PREMIUM QUALITY

SAFETY

Butane gas - 1925°C

- Piercable cartridges 221093 without valve
- Cartridge 220183 with adaptors for refilling butajet lighters etc.
- Contains 100% butane



Ultragas - 2100°C

- Built-in Anti-Flare function
- Gas mixture of propane, butane, propylene



Powergas - 1925°C

- Disposable cartridges with self closing valve
- Contains a gas mixture of 35% propane and 65% butane



System	PSI		G Y		O O	
--------	-----	--	-----	--	-----	--

EN 417:2012

Article no.	221093	220183	220283	220583	220383	220483
Connection	Piercable	Filling tube	EU (7/16")	EU (7/16")	EU (7/16")	EU (7/16")
Weight (g)	280	256	110	337	257	450
Contents (g)	190	168	60	210	175	336
Contents (ml)	350	330	210	380	300	600
Gas mixture	Butane	Butane	Propane / Propylene / Butane	Propane / Propylene / Butane	Propane / Butane	Propane / Butane
ADR	UN 2037	UN 2037	UN 2037	UN 2037	UN 1950	UN 1950
Standard	EN 417	EN 417	EN 417	EN 417	EN 417	EN 417



Safety

Disposable gas

Our filling of gas cartridges is controlled with the greatest of care. An automated weight control on the production line weighs each individual cartridge. The cartridge is then tested for leaks by immersing it in a 55°C water bath for three minutes. If the cartridge weighs too little or too much or if gas leaks out during the water test, it is automatically removed from the production line and discarded.

“The various safety steps in the process guarantee that each cartridge is of the highest quality and that it is completely safe for our customers to use,” “We know that we have unique safety solutions in our new factory and that we therefore always deliver the best products to our customers.”

MAPP® and Ultramapp gas - 2400°C For soldering, brazing and heating applications

- Safer, faster, cheaper and easier to work with than Acetylene
- Not sensitive to shocks
- Environmentally friendly and non toxic gas mixture

NEW



Premium quality Propane - 1925°C

- Adapted to most soldering and brazing applications


System	G Y	G Y	G Y	G Y	G Y
Article no.	220685	222183	221183 / *221184	220885	220983 / *220984
Connection	EU (7/16")	EU 7/16"	US (1")	EU (7/16")	US (1")
Weight (g)	536	1200	1200	536	1200
Contents (g)	405	380	400	405	400
Contents (ml)	750	640	788	750	788
Gas mixture	Propylene/Butane	Propylene	Propylene	Propane/Butane	Propane
ADR	UN 2037	UN 1077	UN 1077	UN 2037	UN 1978
Standard	EN 417	ISO 11118	EN 12205	EN 417	EN 12205

* For non European markets

* For non European markets

Powerjet System

The professional torch

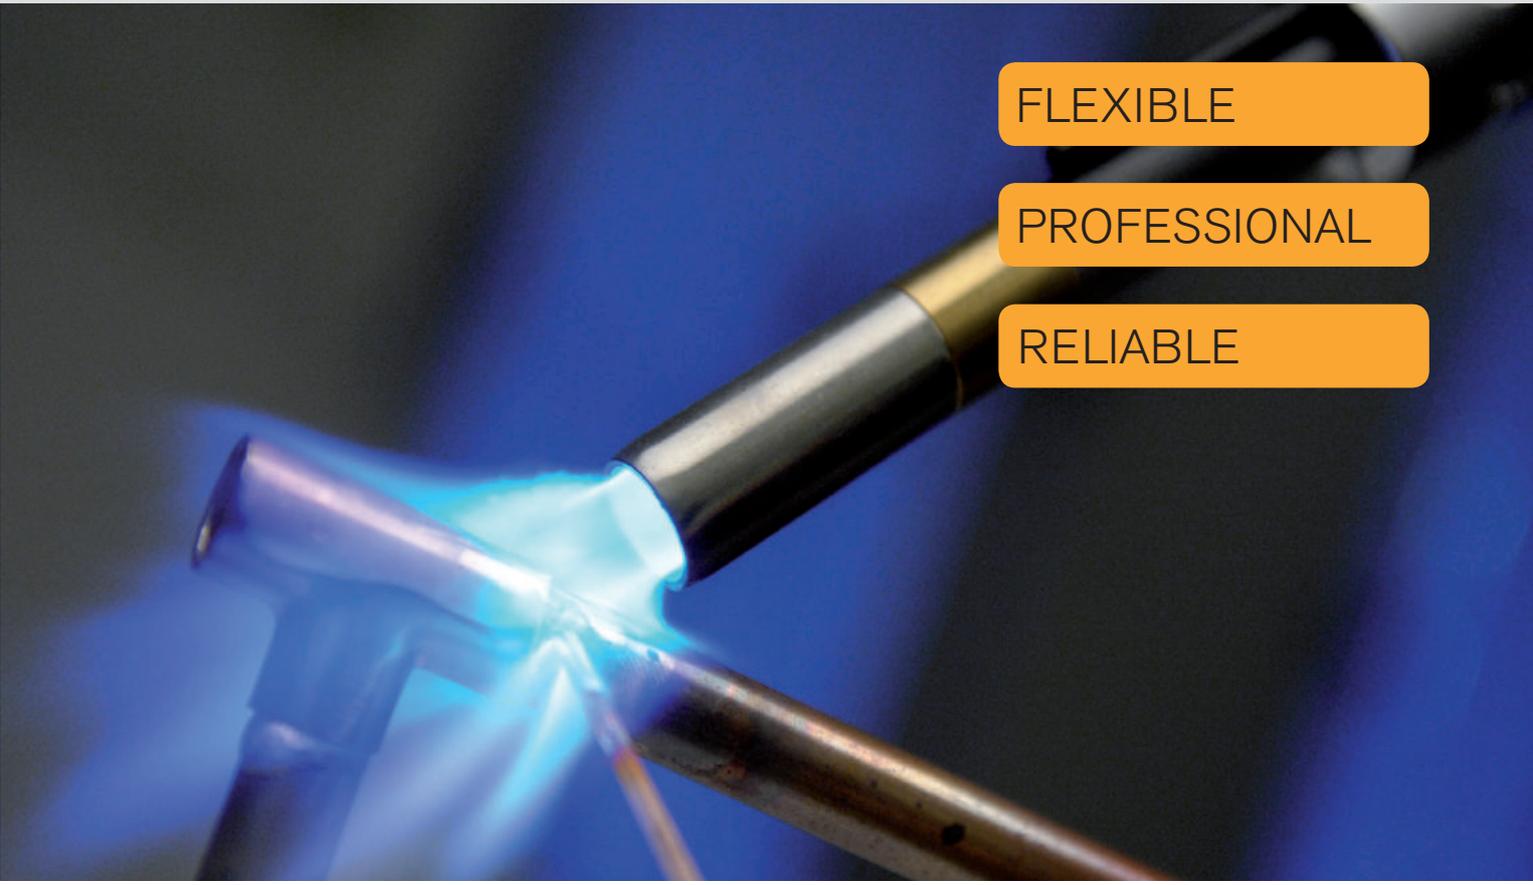


FLEXIBLE

PROFESSIONAL

RELIABLE

Flexibility is the key word to describe the Sievert hand held torch system. These blowtorches provide everything the craftsman or discerning home handyman requires. With many unique features, these are the most advanced blowtorches for brazing or soft soldering, heat-shrinking, heating and dismantling work.

This Sievert Torch System operates on a number of fuels from propane, butane, Propane/Butane mix, Sievert Ultragas (a highly efficient anti-flare mixture) and our MAPP® and Ultramapp for extreme high heat levels.



Systems



Precision

Soldering

Brazing

Heating

Shrinking

Waterproofing/
Welding

Paint stripping

Sheet metal



Powerjet System

The professional torch



- The most powerful and efficient torch system in the market
- The ergonomic handle is both long lasting and reliable
- Reliable Automatic Piezo ignition (up to 30000 ignitions)
- Trigger on/off function helps preventing LPG wastage
- Anti-Flare enables the torch to operate in all positions (360°)
- Full range of 6 easily interchangeable burners
- Easy exchange of nozzles
- Designed for use with MAPP® but also suitable for use with Propane, Ultramapp and Ultragas

Technical data	
Working pressure, bar	2,0
Weight, g	290
Length, mm	180
Height, mm	80



Powerjet 2535



New ergonomic comfort grip

Trigger on/off function helps preventing LPG wastage



No gas emission unless burner fitted


New trigger lock, provides continuous flame for hands-free use

New drop protection for highest safety.



New precise flame adjustment valve, turns only 270°


New (orange) Piezo ignition chock protection cover

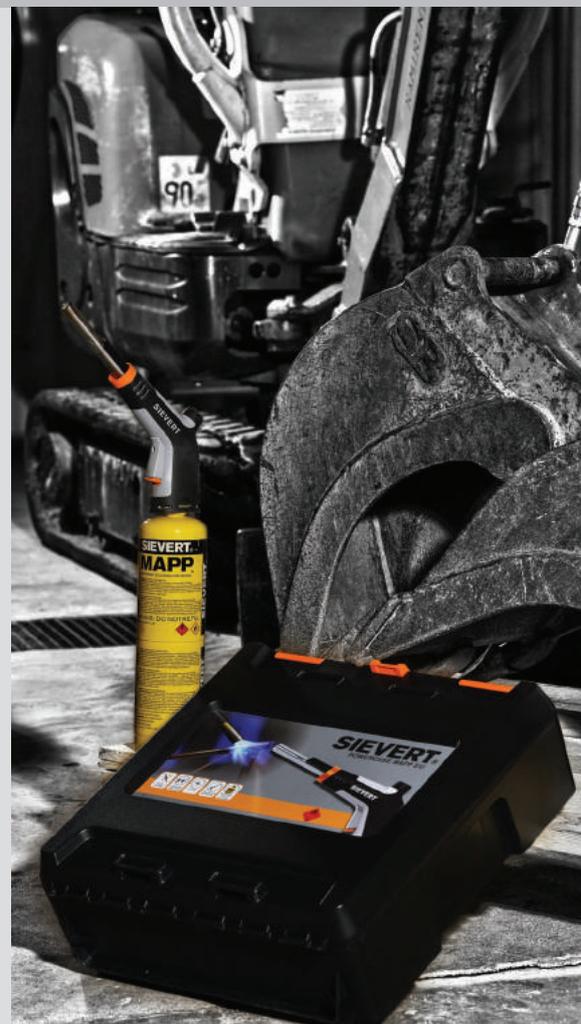

Powerjet



System



Connections:



Sievert M14x1,5 EU 7/16" US 1"

(1) For cylinders 200017, 200019, 200026 & 200060
(2) For cylinders 200032 & 200041



Powerjet	253501 (1)	253502 (2)	253511	253557
Burner included	870601	870601	870601	870701
Burner diameter Ø, mm	14	14	14	16
Gas Consumption, g/h at 2 bar	170	170	170	230
Effect, kW	2,2	2,2	2,2	2,9
Connection	M14x1,5	M14x1,5	EU	US
Gas cartridge	Not included	Not included	Not included	Not included

Powerjet Hose Kit



Hose with valve for Powerjet 253501 and 253502.
Powerjet and cylinder not included.

Hose kit	701262
Length, m	2
Hose diameter Ø, mm	5
Handle connection	M14x1
Valve connection	BSP 3/8" LH

Powerjet 2535 Interchangeable burners



Pin-point burner 870201 Standard burner 870401 Cyclone burner 870601 Cyclone burner 870701 Hot-air burner 870801 Soft flame burner 871001



Powerjet System

The professional torch

Metaljet




System



Heavy Duty



Connections:



EU
7/16"

US
1"



- Metaljet is the heavy duty torch
- Reliable Automatic Piezo ignition (up to 30000 ignitions)
- Trigger on/off function helps preventing LPG wastage
- Anti-Flare enables the torch to operate in all positions (360°)
- Full range of 6 easily interchangeable burners
- Easy exchange of nozzles
- Designed for use with Ultramapp but also suitable for use with Propane Working pressure 2,0 bar

Metaljet	215512
Burner included	Cyclone 870701
Burner diameter Ø, mm	16
Gas Consumption, g/h at 2 bar	230
Effect, kW	2,9
Connection	EU
Gas Cartridge	Not Included

Metaljet 2155 - Interchangeable burners



Pin-point burner
870201

Standard burner
870401

Cyclone burner
870601

Cyclone burner
870701

Hot-air burner
870801

Soft flame burner
871001



Precision



Soft soldering



Heating



Brazing





Paint stripping



Shrinking

Easyjet 2235 interchangeable burners

Easyjet



Connections:




EU 7/16"

System



- Light-weight composite handle
- Developed for DIY applications like soft soldering, loosening bolts, paint stripping, fire lightning
- Delivered with 8704 standard burner. Working pressure 1,5 bar

Easyjet	223512
Burner included	Standard 870401
Burner diameter Ø, mm	16
Gas Consumption, g/h at 1,5 bar	70
Effect, kW	0,9
Connection	EU
Gas Cartridge	Not Included

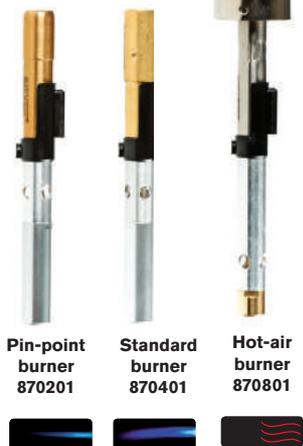


Pin-point burner 870201

Standard burner 870401

Hot-air burner 870801



Easyjet 2295 fixed burner



Connections:



EU 7/16"




US 1"

System



- Simplified hand-held torch with piezo
- Fixed standard flame burner
- Delivered with Sievert Powergas
- Developed for basic DIY applications like soft soldering, loosening of bolts, paint stripping, fire lightning and cooking. Working pressure 1,5 bar

Easyjet	229501	229557
Burner included	Standard 870401	Standard 870401
Burner diameter Ø, mm	16	16
Gas Consumption, g/h at 2 bar	70	70
Effect, kW	0,9	0,9
Connection	EU	US
Gas Cartridge	220483	Not included



Powerjet System

Kits



System



Powerjet kit combined with 1 Ultragas 220583. Suitable for heating, brazing and soldering applications.

Powerjet Kit	253512
Burner diameter Ø, mm	14
Gas Consumption, g/h at 2 bar	170
Effect, kW	2,2
Burner	Cyclone 870601
Connection	EU
Gas Cartridge	220583



System



Metaljet kit	215563	215585
Connection	EU	EU
Metaljet	215512	215512
Burner	Cyclone 870701	Hot air 870801 Cyclone 871001
Gas Cartridge	2x 220685	2x 220885

Professional Service Case made of sturdy plastics.
One cylinder foot is included in all kits



System



Easyjet kit combined with 1 Powergas 220483. Suitable for heating and soldering applications.

Easyjet	223511	229501
Burner diameter Ø, mm	16	16
Gas Consumption, g/h at 2 bar	90	70
Effect, kW	1,2	0,9
Burner	Standard 870401	Standard 870401
Connection	EU	EU
Gas Cartridge	220483	220483

STACKABLE

ERGONOMIC

PORTABLE



PowerCase

Powerjet Kits

PowerCase Ultra



PowerCase Ultra Kit	253505
Burner diameter Ø, mm	14
Gas Consumption, g/h at 2 bar	170
Effect, kW	2,2
Burner	Cyclone 870601
Connection	EU
Gas Cartridge	220583

PowerCase MAPP EU



PowerCase MAPP EU Kit	253521
Burner diameter Ø, mm	14
Gas Consumption, g/h at 2 bar	170
Effect, kW	2,2
Burner	Cyclone 870601
Connection	EU 7/16"
Gas Cartridge	222183

PowerCase MAPP US



PowerCase MAPP EU Kit	253583
Burner diameter Ø, mm	16
Gas Consumption, g/h at 2 bar	230
Effect, kW	2,9
Burner	Cyclone 870701
Connection	EU 7/16"
Gas Cartridge	221183

PowerCase including neutral label



Empty PowerCase	600000
Burner diameter Ø, mm	-
Gas Consumption, g/h at 2 bar	-
Effect, kW	-
Burner	-
Connection	-
Gas Cartridge	-

Powerjet System

Interchangeable burners

SIEVERT®

	Pin-point burner 870201	Standard burner 870401	Cyclone burner 870601	Cyclone burner 870701	Hot-air burner 870801	Soft flame burner 871001
	 	 	 	 	 	 
Precision	<ul style="list-style-type: none"> For small soft soldering jobs Gives a precise and stable flame 	<ul style="list-style-type: none"> For soft soldering and other small heating jobs 	<ul style="list-style-type: none"> For brazing and soft soldering Intensive and effective short flame that reaches around the pipe 	<ul style="list-style-type: none"> For brazing and soft soldering Highly efficient cyclone burner with increased tip diameter 	<ul style="list-style-type: none"> For shrinking and paint stripping Powerful and wind stable hot-air stream 	<ul style="list-style-type: none"> For shrinking and heating jobs Powerful and wind stable soft flame
	Soft soldering					
	Heating					
	Brazing					
	Paint stripping					
	Shrinking					
						
						

System

Burner no.	870201	870401	870601	870701	870801	871001
Burner diameter Ø, mm	15	16	14	16	38	24
Gas Consumption, g/h at 2 bar	40	90	170	230	130	230
Effect, kW at 2 bar	0,5	1,2	2,2	2,9	1,7	3,5
Soldering max pipe Ø, mm	10	18	40	50	-	22
Brazing max pipe Ø, mm	-	-	18	20	-	-

Turbojet

Easy-to-use torch with swivel burner for hands-free work

NO FLARE-UP

360° SWIVEL




The lightest hand held torch on the market, yet the most powerful.

The new Turbojet is engineered with the craftsman in mind. The updated swivel burner is now providing 360 degrees of rotation in not one but two different places, making the places that are impossible to reach, possible.

All new aluminum body gives the Turbojet a unique design and makes it 50% lighter than its predecessor.


The new Turbojet is designed with passion and innovation, just like everything else at Sievert.

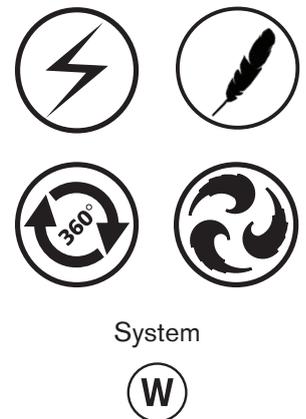

50% lighter



360° swivel burner for hard-to-reach places

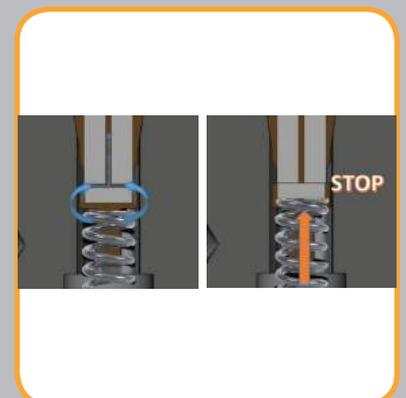

Double gas stop system

Turbojet swivel torches

Turbojet



Twin swivel torches

System



Connections:



EU
7/16"

US
1"




- For brazing of tubes up to \varnothing 25 mm

Technical data	
Working pressure, bar	0-3,5
Burner diameter \varnothing , mm	14x2
Gas consumption, g/h	590
Effect, kW	7,6
Soft soldering max \varnothing , mm	60
Brazing max \varnothing , mm	25

Valve connections	Art no.
EU 7/16" with piezo	264112
US 1" with piezo	264133

Single swivel torches

System



Connections:



EU
7/16"


US
1"



- For all kinds of brazing, soldering and heating applications

Technical data	
Working pressure, bar	0-3,5
Burner diameter \varnothing , mm	14
Gas consumption, g/h	295
Effect, kW	3,8
Soft soldering max \varnothing , mm	40
Brazing max \varnothing , mm	18

Valve connections	Art no.
EU 7/16" with piezo	261012
US 1" without piezo	262033
US 1" with piezo	261033

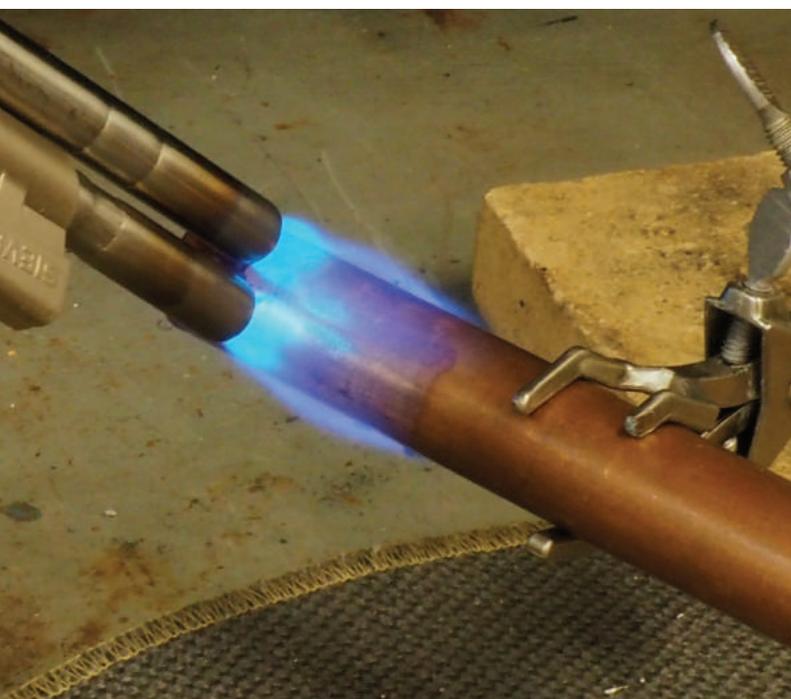

Soldering mat

For wall and floor protection when soldering. Saves heat and time. For temperatures up to 760°C.



Solder mat no.	415061
Dimensions:	25x25 cm

Handyjet

The new multi-purpose torch



PIEZO IGNITION

ANTI-FLARE



Soldering



Heating



Paint stripping

Multi-purpose is the keyword for our new Handyjet line. Examples of applications are soldering, paint stripping, de-icing, cooking, barberque and many other heating applications.

New unique burner

Our new Handyjet has a new powerful, efficient and windstable multi-purpose burner. The new unique burner is designed with a preheating tube, that heats up the gas before combustion. This means that our new Handyjet can be used upside down without any flare-ups.



Handyjet



Gas cartridges not included.
For kits with included gas cartridges
see handyjet kits on page 55

Article number	228101	228201	228301
Burner diameter Ø, mm	20	20	20
Gas consumption, g/h	140	140	80
Effect, kW	1,8	1,8	1,0
Piezo ignition	No	Yes ⚡	Yes ⚡
Gas cartridge connection	EU (7/16")	EU (7/16")	Pierceable

Sievert Handyjet 2281, 2282 and 2283



Drop protection for maximum safety and durability



Piezo ignition and new superior flame adjustment valve



Ergonomic comfort grip

Handyjet Kits



Article number	228202	228203	228302	228303
Burner diameter Ø, mm	20	20	20	20
Gas consumption, g/h	140	140	80	80
Effect, kW	1,8	1,8	1,0	1,0
Piezo ignition	Yes	Yes	Yes	Yes
Gas cartridge connection	EU (7/16")	EU (7/16")	Pierceable	Pierceable
Gas Cartridge included	220383	220383 x 2	221093	221093 x 2

Gases

Recommended disposable gas cartridges



Product name	Butane gas	Powergas
Art. no.	221093	220383
Connection	Pierceable	EU (7/16")
Contents (ml)	350	300
Gas mix	Butane	Propane / Butane

Butajet


Refillable torch system

HANDY

REFILLABLE



Pro torch 430000




- Gives a precise and adjustable flame ideal for cooking, lighting barbeques and candles also small soldering jobs
- Automatic ignition
- Complete portability
- Hi-tech polymer construction - light weight yet sturdy
- Flame temperature 1300°C
- Burning time per fill 60 min

Pro torch with rubber grip 432000



- Gives a stable and adjustable flame ideal for cooking, lighting barbeques and candles also small soldering and shrinking jobs
- Automatic ignition
- Complete portability
- Ergonomic handle with rubber grip
- Removable safety stand included
- Flame temperature 1300°C
- Burning time per fill 220 min

Pro torch heavy duty 435000




- Gives a powerful and adjustable flame ideal for cooking, lighting, melting/de-icing, soldering and shrinking jobs
- Automatic ignition
- Complete portability
- Highest output flame of any butane torch
- Separate Controls for Fuel and Air
- Flame temperature 1350°C
- Burning time per fill 200 min

Microjet torch 423000



- Gives a precise and wind stable pin-point flame Ideal for melting/de-icing of snow and ice, lighting barbeques, candles and small heating works
- Automatic ignition
- Complete portability
- Fueled by butane lighter or included fuel cell
- Flame temperature 1300°C
- Burning time per fill 20 min

Turbo Lite torch 420001



- Gives an exact and wind stable pin-point flame ideal for de-icing of bicycle- and car locks, camping or as a cigarette lighter
- Automatic ignition
- Complete portability
- Flame lock child resistant
- Flame temperature 1300°C
- Burning time per fill 30 min

Electric ignition soldering kit 410001

Premium soldering kit 412001

- For applications such as automotive and truck repairs, TV- and radio repairs, jewelry repairs, electronics, air condition, shrinking and other heating jobs
- Automatic piezo ignition
- Portable multi function heat tool
- Flame temperature 1300°C



- Power range 30-100 Watt
- Burning time per fill 120 min



- Power range 30-125 Watt
- Visible fuel level
- Burning time per fill 210 min



Refilling cartridge

- Disposable cartridge with self closing valve
- Contains 100% butane
- For refilling of the Butajet line



Technical data	220183
Connection	Filling tube
Weight, g	256
Content, g	168
Content, ml	330
Cartridge	Disposable

Gardener

Heat away the weeds

CONVENIENT

ENVIRONMENTALLY FRIENDLY



Gardener



Slowly sweep the burner about 5 cm above the weeds. The plant shall be heated, not burned. The heating causes the cell walls in the plant to burst and the plant dies of drying out. A correct heating can be checked by pressing a leaf between the fingertips. A dark green fingerprint shall then appear on the leaf.

Heat away the weeds

- Convenient - Saves your knees and back
- Environmentally friendly - No chemicals
- Automatic piezo ignition - No matches needed



Weed.

Heat it.

2-3 days later.

After 2-3 days the weeds have wilted completely - with just the need to sweep up and compost. The treatment is best carried out in spring and is most effective against small weeds. Small annual weeds die completely after one treatment. Grass, dandelion and other perennial weeds need repeated treatment throughout the growing season.

Gardener no.	223001	223101	223097
Gas Consumption, g/h	300	400	400
Length, mm	770	700	700
Weight, g	750	750	750
Connection	EU	Sievert	US

Cylinder/gas cartridge not included

RESTORE

Grinding wheel dresser



Reconditioning grinding wheels

A worn or clogged grinding wheel seriously reduces its grinding ability. With a Sievert Grinding Wheel Dresser, the grinding wheel can be restored to almost new condition and large amount of money will be saved.

The sturdy and comfortable hardwood handle provides a stable but soft grip. The roller comprises complete discs of punched Swedish special steel with U-shaped teeth. Through a special method of hardening, the teeth have been given the correct hardness and toughness. Supporting heels on the dresser cover enable it to be placed precisely against the grinding wheel. The cover also provides protection for the face and hands against sparks and flying particles.

The choice of Sievert Grinding Wheel Dresser depends on the grain size, hardness and speed of the grinding wheel.



GWD no.	361208	361108	361008
Grinding wheel max Ø, mm	500	500	200
Max width, mm	102	63	38
Max peripheral speed m/s	50	50	30



Dresser roll no.	701012	701002	700992
For GWD art no.	361208	361108	361008
Ø, mm	56	55	36
Width, mm	65	39	21

Waterproofing

Complete range of hot-air welding tools and machines

Whether you should weld modified bitumen such as SBS and APP or plastic membranes such as TPO and PVC by using hot-air, Sievert offers a complete range of hot-air welding machines.

Modified Bitumen Welding



Electric hot-air welding machine
TW 5000



Electric hot-air welding tool
DW 3000

Plastic Welding



Electric hot-air welding machine
TW 5000



Electric hot-air welding tool
DW 3000

Industry / Automotive



Electric hot-air welding tool
DW 3000

Flooring / Plastic Welding



Electric hot-air welding tool
DW 3000



SIEVERT®



DW 3000

The revolutionary hot-air tool

POWERFUL

ERGONOMIC

PRECISE



The power, precision, and control of the DW 3000 comes from a brushless motor powered by next-gen electronics.

Next-gen electronics provide the DW 3000 its unique features and also make it possible to precisely control the power and heat of the tool.



30 % less weight and more ergonomic than market standard



50 % more airflow than market standard



Extremely accurate temperature control

DW 3000


Models:

Voltage	Art no.
230 V (EU)	293001
120 V (US)	293047
120 V (UK)	293002



NEW

Delivered in the brand new Sievert Powercase



DW 3000 hot-air tool

Technical Data DW 3000 230V - 293001

~	~ 230 V 2000 W		810 g 1.80 lbs		<table border="0"> <tr> <td>III</td> <td>370 l/min</td> <td>Pa 4100</td> </tr> <tr> <td>II</td> <td>340 l/min</td> <td>Pa 3600</td> </tr> <tr> <td>I</td> <td>310 l/min</td> <td>Pa 3100</td> </tr> </table>	III	370 l/min	Pa 4100	II	340 l/min	Pa 3600	I	310 l/min	Pa 3100
III	370 l/min	Pa 4100												
II	340 l/min	Pa 3600												
I	310 l/min	Pa 3100												
~	50/60 Hz		65 dB		<table border="0"> <tr> <td>Ø 48 mm</td> </tr> <tr> <td>Ø 1.9 inch</td> </tr> </table>	Ø 48 mm	Ø 1.9 inch							
Ø 48 mm														
Ø 1.9 inch														
	100-600 °C		3 m		<table border="0"> <tr> <td>330 mm</td> </tr> <tr> <td>13.0 inch</td> </tr> </table>	330 mm	13.0 inch							
330 mm														
13.0 inch														

Technical Data DW 3000 120V - 293047/293002

~	~ 120 V 1700 W		1.80 lbs		<table border="0"> <tr> <td>III</td> <td>12.7 cfm</td> <td>Pa 4000</td> </tr> <tr> <td>II</td> <td>11.7 cfm</td> <td>Pa 3500</td> </tr> <tr> <td>I</td> <td>10.6 cfm</td> <td>Pa 3000</td> </tr> </table>	III	12.7 cfm	Pa 4000	II	11.7 cfm	Pa 3500	I	10.6 cfm	Pa 3000
III	12.7 cfm	Pa 4000												
II	11.7 cfm	Pa 3500												
I	10.6 cfm	Pa 3000												
~	50/60 Hz		65 dB		<table border="0"> <tr> <td>Ø 1.9 inch</td> </tr> </table>	Ø 1.9 inch								
Ø 1.9 inch														
	220° - 1110° F		6 ft		<table border="0"> <tr> <td>13.0 inch</td> </tr> </table>	13.0 inch								
13.0 inch														

Heating Element

Air-filter



Model	Article no.
DW 3000 (230 V)	297101
DW 3000 (120 V)	297147



Air-Filter	Article no.
DW 3000	297150



DW 3000 Accessories

Waterproofing nozzles and speed welding nozzles

Nozzles

Sievert welding nozzles have a 32 mm connection and can be used on most hot air welders.




Art no.	Description	Diameter, mm
297305	Tubular	ø 5
297320	Angle 15°	20 x 2
297321	Angle 60°	20 x 2
297322	Angle 90°	20 x 2
297340	Flat	40 x 2
297380	Flat	80 x 2

Speed welding nozzles

Quick-welding nozzles made of high quality stainless steel. Attachable to nozzle 297305.



Art no.	Description	Diameter, mm
297304	Speed welding round	4 mm
297355	Speed welding round	5 mm
297335	Speed welding triangular	3,7 x 5,7 mm
297357	Speed welding triangular	5 x 7 mm
297360	Tacking	-

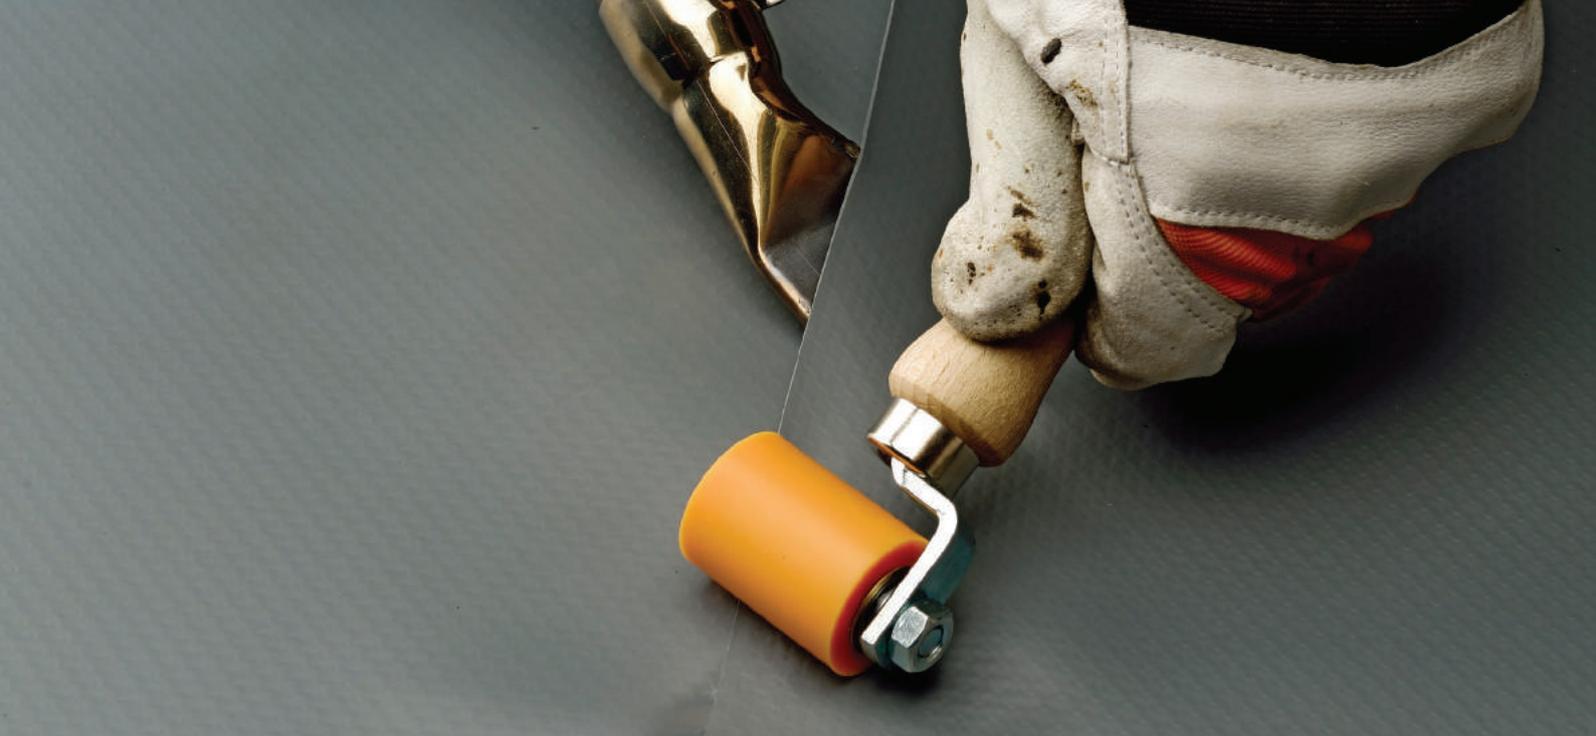

Pressure Rollers

Developed for perfect results

Silicone Pressure rollers



Silicone roller with ball bearings for overlap welding, screwed axis, ergonomical wooden handle for maximum pressure, bracketed on one side.

Art no.	Roller Size, mm	Weight, g	Model
297512	Ø 33 x 28	155g	Straight
297513	Ø 33 x 45	240g	Straight
297514	Ø 33 x 45	240g	Angle 45°
297515	Ø 33 x 90	350g	Straight

Steel Pressure Rollers



Heavy duty steel pressure roller for cold pressure welding, Two smooth running ball bearings, riveted axis, ergonomical wooden handle for maximum pressure, bracketed on one side for overlap welding.

Art no.	Roller Size, mm	Weight, g	Model
297531	Ø 40 x 40	490g	Straight
297532	Ø 40 x 60	625g	Straight

PTFE Pressure Rollers



PTFE roller for overlap welding of much harder and tougher membranes such as polyolefin. Two smooth running ball bearings, screwed axis, ergonomical wooden handle for maximum pressure, bracketed on one side.

Art no.	Roller Size, mm	Weight, g	Model
297521	Ø 33 x 28	165g	Straight
297522	Ø 33 x 45	365g	Straight



Metal Pressure Rollers



Extra thin metal pressure roller for PVC-sheets welding and flooring installation, enclosed smooth-running ball bearings, extra thin, convex metal roller, ergonomical wooden handle for maximum pressure.

Art no.	Roller Size, mm	Weight, g
297541	Ø 34 x 6	195g

Brass Pressure Rollers



Brass pressure roller, enclosed smooth-running ball bearings, extra thin, convex brass roller, ergonomical wooden handle for maximum pressure.

Art no.	Roller Size, mm	Weight, g
297542	Ø 28 x 6	145g

Seam tester



90° angled seam tester, ergonomical wooden handle, optimized tip.

Art no.	Length, mm	Weight, g
297551	250	100g

Scissors



NEW

Stainless steel scissor, thick blade, ergonomic plastic grip.

Art no.	Blade length, mm	Weight, gr.
297560	110	160g

Accessories kit



NEW

Art no.	293050
---------	--------



TW 5000

High Quality Welding Result

POWERFUL

EASY TO OPERATE



The Sievert TW 5000 was designed with the contractor in mind. It is the most versatile, reliable, powerful and easy to operate automatic hot-air welding machine available on the market.

The Sievert TW 5000 can weld any membrane, such as plastic, rubber and modified bitumen.

Sievert's long experience in making heating tools for the roofing industry together with new modern industrial design has created a truly professional and user friendly welding machine.



Four-wheel drive and belt system assures wrinkle-free welding

Powerful engine and efficient drive system allows climbing ability up to 30°

Separate free rolling wheels for easy transport



Easy to operate display unit. Digital display showing temperature, speed and incoming voltage

Runs on 400 V or 230 V

All electronics are made in accordance to highest industrial standard



Powerful fan for high-speed welding

Adjustable handle made of sturdy steel

Automatic start/stop sensor when the hot-air nozzle is engaged/disengaged



TW 5000 hot-air welding machine

Technical data TW 5000			
Temperature	40°C - 650°C fully adjustable	Cable length	90 cm
Speed	0 - 7m/min fully adjustable	Size	56 x 38 x 25 cm
Air flow	0 - 48 l/s fully adjustable	Weight (incl. 8kg)	30 kg
Display	Digital LED	Declaration of conformity	
Emission level	70 dB		



All models are delivered in a sturdy steel transport box.

Model 2990

- Overlap welding of PVC and similar roofing membranes



Plastic welding

Model 2991

- Overlap welding of modified bitumen and similar roofing membrane



Bitumen

Model 2993

- TW 5000 Wideweld, provides a wide nozzle for up 130 mm welding.



130 mm

TW 5000 no.	299001	299005	299047	299101	299347
Voltage	400 V ~	220-230 V ~	220-230 V ~	400 V ~	230 V ~
Power	6300 W	5000 W	6300 W	6300 W	6300 W
Ampere	16 A	22 A	28 A	16 A	29 A
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Nozzle width		55 mm		90 mm	
Width of welding seam		40-55 mm		70-100 mm	120-130 mm

LP gas

Information

Sievert on LP gas

Gaseous paraffins is the correct description for what we call LP gas. LP gas consists of the hydrocarbons propane and butane, or a mixture of the two. These gases are extracted from crude oil. LP gas or LPG stands for liquefied petroleum gas. At normal temperatures, LP gas is gaseous but is a liquid when under pressure. Propane must be distributed in steel cylinders that can withstand high pressure. Butane can be distributed in lighter gas cartridges.

LP gas and safety

Leaking LP gas is a fire hazard.
LP gas is heavier than air.
LP gas uses air during combustion.

There are primarily two things to think about to prevent accidents with LP gas. 1. Avoid leakages. 2. Ensure good ventilation. Leaking LP gas can ignite and cause a fire, or in the worst case, an explosion. The cylinder valve should always be closed when the cylinder is not in use. The cylinder should be stored upright and, if possible, at ground level since LP gas is heavier than air and can therefore accumulate in cellars, manholes etc. Good ventilation is important when working indoors as the flame consumes air. Lack of oxygen causes incomplete combustion, which produces carbon monoxide instead of carbon dioxide. Carbon monoxide is a treacherous and deadly gas.

LP gas and efficiency

Permits very high power outputs.
Energy content is high.
Fuel is easy to store and transport.

A large amount of fuel only occupies a small space and is therefore easy to store and transport. LP gas forms a combustible mixture with air when the proportion of gas is between 2 and 10 percent. When the gas changes from a liquid to a gaseous form, the volume increases by 250 times. In other words, the energy content is high. LP gas can be stored in its container almost indefinitely without the gas breaking down.

LP gas and the environment

LP gas is non-toxic and does not contain hazardous additives.
It does not contaminate air or water.

LP gas does not produce any hazardous combustion gases, just carbon dioxide and water vapor. The gas does not contaminate water, it does not produce soot, it is not corrosive and it does not cause corrosion to iron or other metals. It does not contain lead or heavy metals and is non-toxic. In other words, LP gas is an environmentally friendly fuel. The only additive is a strongly smelling substance that acts as a warning signal for leaking gas. Normally, LP gas has no smell.

LP gas and handling

Work in well-ventilated areas.
Avoid placing the LP gas cylinder near sources of heat.
Ensure that the cylinder is stored upright during transport.

You should regularly check valves and connectors for leakage. Remember also that good ventilation is important at areas where the gas is stored or used. Ventilation is also important to ensure effective combustion. Make sure that the cylinder is at ambient temperature when you begin working. If you are going to use the fuel at temperatures below zero Celsius, use propane instead as butane does not gasify at low temperatures.

LP gas and fire


Always extinguish LP gas fires with powder, never water.
Move LP gas cylinders to a safe place if there is a fire in the vicinity.
If possible, close the valve on the cylinder.

Steel cylinders are fitted with a safety valve that opens if the pressure increases too much. This can occur if there is a fire close to the cylinder. The valve stops the cylinder exploding. To guarantee the function of the safety valve, it is important that the LP gas cylinder is stored in a standing position. In addition, a closed valve stops unchecked gas flow if a hose should become damaged.

LP gas and equipment

Never allow an untrained person to use the equipment.
Only use special LP gas parts.
Be extra careful with valves and connectors.

Never use other valves, burners or hoses that those designed for use with LP gas. Sievert LP gas hose conforms to the EN 559 standard. The hose consists of an internal rubber layer that is LP gas-proof, armouring an external rubber layer that can withstand air and aging. All equipment shown in this product catalogue is manufactured of materials that withstand LP gas and is designed so that the risk for leakage is minimal.

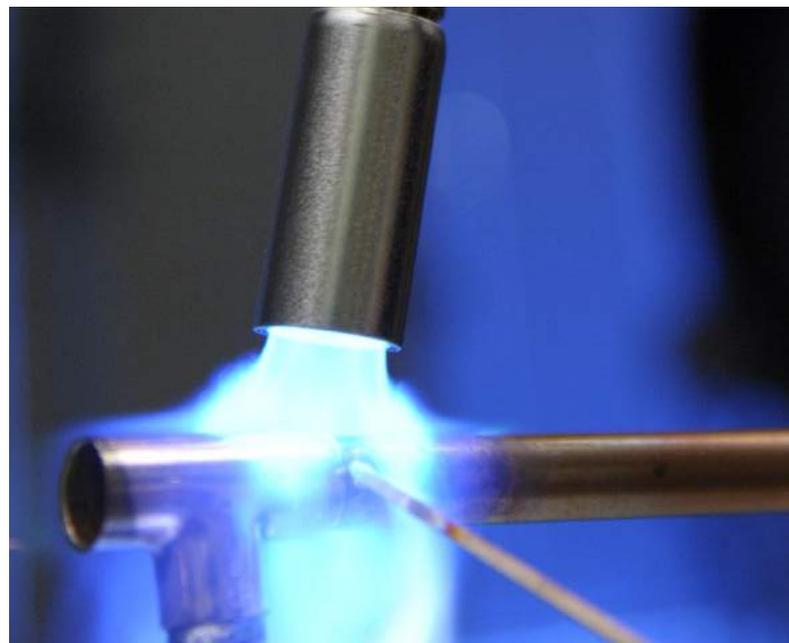

LP gas and checks

Ensure that you have the correct equipment for the job. Make sure that you have tightened all valves and connectors. Regularly inspect the equipment and check that the system is sealed.

Read the instructions for use and follow the safety advice. Use soapy water or a special liquid for detecting leakages on valves and joints to find any leaks. LP gas hoses should be checked very carefully and changed if you see any changes. Bend the hoses and look for cracks in the rubber. Hoses exposed to sunlight with age quicker than those used indoors.

LP gas and storage

LP gas is not affected by long storage periods. Always disconnect equipment from the container. Store the cylinder in a well-ventilated area.

Avoiding storing LP gas cylinders in areas that are warm. Temperatures below zero Celsius are, however, perfectly safe for storage. Ensure that the ventilation is good. In principle, LP gas can be stored indefinitely in its container without the quality being affected. Remember to remove all connectors before storing the equipment. To empty the system of gas, close the valve on the LP gas cylinder. Then close any valves on the rest of the equipment. In this way, you will avoid LP gas spillage when you open the system again.

LP Gas

LP gas output from a cylinder

When LP gas turns from a liquid to a gas, heat is required which is taken from the liquid itself, from the container and from the surrounding air. LP gas and the bottle become cooler which reduces the pressure in the container. For larger burners, and especially during continuous use, a sufficient container size is necessary so that the burner can work at a constant power. When using larger burners or burners with high gas consumption, ensure the cylinder size is large enough to deliver the required gas, without significant temperature drop. Table below shows an example of the maximum quantity of gas possible to use during one hour for burners requiring 2 bar pressure. Conditions for this example are the following: gas – propane, cylinder size 11 kg, continuous gas use during one hour, temperature of air and cylinder.

Temperature	+20°C	0°C
Full cylinder 11 kg propane	3.8 kg	1.6 kg
Half cylinder 5.5 kg propane	1.9 kg	0.85 kg

For large gas burners you need to have big gas cylinders with enough gas or several cylinders linked together.

Temperature of the gas flame

Theoretically, LP gas has a maximum flame temperature of 1925 °C. In practice, this temperature is not reached when heating an object. The temperature achieved depends on the size of the object, how much heat is dispersed, the ability of the burner to transfer heat, the size of the burner and how long the object is heated. Therefore, the choice of burner depends on the job to be carried out.

LP gas and technical specifications

	Butane	Propane
Chemical formula	C ₄ H ₁₀	C ₃ H ₈
Density at 15°C	Heavier than air	Heavier than air
As gas	2.40 kg/m ³	1.85 kg/m ³
As liquid	0.58 kg/l	0.51 kg/l
Boiling point at atmospheric pressure	-2°C	-42°C
Gas pressure at -20°C	0	1.5 bar
Gas pressure at 0°C	0	4 bar
Gas pressure at +20°C	1.3 bar	7.5 bar
Energy content	49.5 MJ/kg 12.6 kWh/kg	50.4 MJ/kg 12.8 kWh/kg
Amount of air required for combustion	12.0 m ³ /kg	12.2 m ³ /kg
Maximum flame temperature with air	1925°C	1925°C
Combustion mixtures, volume-% gas in air	1.5 - 8.5%	2.1 - 9.5%

Melting points of soldering metals

Soldering metal	Temperature
Tin solder	190 - 280°C
Aluminium soft solder	380°C
Aluminium hard solder	580°C
Silver solder	610°C
Phosphor copper solder	720°C
Bronze solder	860°C

Melting points of metals


Metal	Temperature
Lead	327°C
Zinc	419°C
Aluminium	658°C
Silver	961°C
Gold	1063°C
Copper	1084°C

Combination

Chart

Application code

Shows the applications for the product.

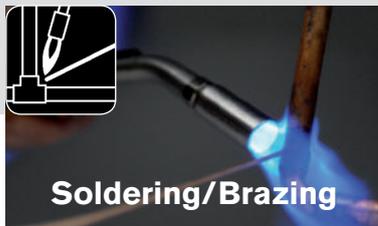

Promatic

Cyclone burners for soft soldering and brazing

334001 Ø14mm

333501 Ø19mm

333601 Ø25mm

Burners for soft soldering

333301 Ø14mm

334301 Ø19mm

334401 Ø25mm

Pin-point burner

333301 Ø14mm

Cyclone burner

334001 Ø14mm



Regulator connection: Shell, POL, DIN Kombi, Italian



Propane hoses Ø 5, 6, 3 8mm



336611 BSP 3/8"LH
336628 M14X1

Pro 86

Cyclone burners for soft soldering and brazing

For Pro 86

352403 Ø19mm

352503 Ø25mm

Burners for soft soldering

For Pro 86

393802 Ø17mm

393902 Ø17mm

394002 Ø17mm

394102 Ø22mm

871901 Ø17mm

872501 Ø25mm

351102

350902

Burners for soft soldering and jewelry work

For Pro 86

884204 Ø8mm

872001 Ø12mm

350101

Burners for soft soldering

393802 Ø17mm

393902 Ø17mm

394002 Ø17mm

351102



Pro 88



348641/348841 BSP 3/8"LH
348642/348842 M14X1

Regulator connection: R 3/8"V



Valve 700001



Refillable cylinders 2000/ 2012

Powerjet

Cyclone burners for soft soldering and brazing

870601 Ø14mm

870701 Ø16mm

Soft flame burners

Standard burner

871001 Ø24mm

870401 Ø16mm

Easyjet 2295 EU
Fixed standard burner

Pin-point burner

870201 Ø15mm



Cylinder and cartridge connection:





Soft flame burners



- 334791 **Ø28mm**
- 334191 **Ø38mm**
- 334891 **Ø50mm**

Hot-air burners



- 335990 **Ø25mm**
- 334990 **32x15mm**
- 333401 **Ø38mm**

Power burners



- 335002 **Ø40mm**
- 335602 **Ø60mm**
- 335102 **Ø50mm**
- 335302 **Ø60mm**
- 337302 **Ø60mm**

Hot-air burners




- 335890 **32x15mm**

Soldering Irons



- Soldering Iron 337030
- Portable Soldering Iron 338030
- 700301
- 700250
- 700350
- 700400
- Longlife 700550
- 700245
- 700500
- 700800
- Longlife 700353

Flat flame burner



- 334501 **40x8mm**

Hot-air burners



- 334990 **32x1,5mm**
- 333401 **Ø38mm**

Soft flame burners



For Pro 86

- 352890 **Ø28mm**
- 352990 **Ø38mm**

Power burners



For Pro 88

- 295101 **Ø34mm**
- 295001 **Ø50mm**
- 295301 **Ø60mm**
- 295402 **Ø70mm**
- 294102 **Ø28mm**
- 294202 **Ø32mm**
- 293401 **Ø34mm**
- 294302 **Ø35mm**
- 294402 **Ø50mm**

Neck tubes Titanium

- 355501-100mm
- 355001-350mm
- 355701-500mm
- 355601-750mm

Neck tubes Brass

- 100mm-350501
- 350mm-351001
- 500mm-350701
- 600mm-350801
- 750mm-350601


Soldering Irons



For Pro 86

- Soldering Iron 349241
- 708121
- 701633 Longlife
- 701800
- 701630
- 295501
- 701725 Longlife
- 256200
- 707120
- 702070

Flat flame burner



For Pro 86

- 351703 **35x5mm**
- 872304
- 350101

Hot-air burners




- 870801 **Ø38mm**

Soft flame burners



- 871001 **Ø24mm**

Hot-air burners



- 870801 **Ø38mm**

Soft flame burners



- 871001 **Ø24mm**

Hot-air burners



- 716941
- 870801 **Ø38mm**

Spare Parts

Information

Promatic Spare Parts	Art. no.
Trigger piezo repair kit	722301
Trigger piezo repair kit for old Promatic handle (336601)	722201
O-ring 9,3 x 2,4 for Promatic burners (5 pcs included)	161291
Pro Spare Parts	Art. no.
Small knob for Pro 3488 (5 pcs included)	146227
Large knob for Pro 3488 (5 pcs included)	146221
Pro burner Spare Parts	Art. no.
Gasket 19x10x1,5 for 2934, 2941, 2942, 2943, 2944, 2960, 3938, 3939, 3940, 3941 (5 pcs included)	169235
Heavy-duty torch 6250 Spare Parts	Art. no.
Knob & Spindle for Heavy-duty torch 652010, 652020	625011
PSI Spare Parts	Art. no.
O-ring for EU 7/16" connection (2 pcs included)	830806
Regulator Spare Parts	Art. no.
Rubber sealing for POL (hand tightening) (5 pcs included)	152588
Gasket for Regulator DIN-Kombi and Shell (5 pcs included)	168912
Gasket for Regulator Italian connection (5 pcs included)	169716
2000 cylinder and valve Spare Parts	Art. no.
O-ring for Sievert M14x1,5 connection (2 pcs included)	830606
Gasket for Sievert M14x1,5 connection (2 pcs included)	830306
Powerjet Spare Parts	Art. no.
Gasket for Sievert M14x1,5 connection (2 pcs included)	830306
O-ring for Sievert M14x1,5 connection (2 pcs included)	830606
Gasket for US 1"UNEF connection (glue is required) (2 pcs included)	152025
O-ring for EU 7/16" UNEF connection (2 pcs included)	830806
Cartridge and cylinder support for 2000, 2206, 2208, 2209, 2211	700725
Cartridge support for 2203, 2204, 2205, 2206, 2208	700726
Gardener Spare Parts	Art. no.
Gasket for Sievert M14x1,5 connection (glue is required) (2 pcs included)	830306
O-ring for Sievert M14x1,5 connection (2 pcs included)	830606
Gasket for US 1"UNEF connection (2 pcs included)	152025
O-ring for EU 7/16" UNEF connection (2 pcs included)	830806
Piezo repair kit	722230
TW 5000 Spare Parts	Art. no.
Replacement heating element 400 V ~, 6300 W	799001
Replacement heating element 220-230 V ~, 6300 W	799047
Replacement heating element 220-230 V ~, 5000 W	799007
DW 2000 Spare Parts	Art. no.
Heating Element 230V	297201
Heating Element 120V	297247

SIEVERT
TITANIUM



Search index

Art no.	Product Category	Page	Art no.	Product Category	Page	Art no.	Product Category	Page
200417	Refillable cylinders	42	294402	Pro 88	26	306312	Regulators	41
200041	Refillable cylinders	42	295001	Pro 88	28	306314	Regulators	41
200060	Refillable cylinders	42	295101	Pro 88	28	306315	Regulators	41
200426	Refillable cylinders	42	295301	Pro 88	28	306319	Regulators	41
201251	Refillable cylinders	42	295401	Pro 88	28	306961	Regulators	41
201260	Refillable cylinders	42	295402	Pro 88	28	306962	Regulators	41
201318	Refillable cylinders	42	295501	Pro 86	36	308111	Regulators	41
203902	Refillable cylinders Accessories	43	296001	Pro 88	26	308115	Regulators	41
204402	Refillable cylinders Accessories	43	293001	DW 3000	67	308311	Regulators	41
204403	Refillable cylinders Accessories	43	293002	DW 3000	67	308315	Regulators	41
215512	Metaljet	50	293047	DW 3000	67	309121	Regulators	41
219741	Pro 86	19	293050	DW 3000 Accessories Kit	71	309122	Regulators	41
219742	Pro 86	19	297101	DW 3000	67	309124	Regulators	41
220283	Cartridges & cylinders	44	297147	DW 3000	67	309129	Regulators	41
220383	Cartridges & cylinders	44	297150	DW 3000	67	309175	Regulators	41
220483	Cartridges & cylinders	44	297304	Speed welding nozzles	68	309221	Regulators	41
220583	Cartridges & cylinders	44	297305	Nozzles	68	309222	Regulators	41
220685	Cartridges & cylinders	45	297320	Nozzles	68	309225	Regulators	41
220885	Cartridges & cylinders	45	297321	Nozzles	68	309229	Regulators	41
220983	Cartridges & cylinders	45	297322	Nozzles	68	309345	Regulators	41
220984	Cartridges & cylinders	45	297335	Speed welding nozzles	68	309399	Regulators	41
221093	Cartridges & cylinders	44	297340	Nozzles	68	333301	Promatic	12
221183	Cartridges & cylinders	45	297355	Speed welding nozzles	68	333401	Promatic	13
221184	Cartridges & cylinders	45	297357	Speed welding nozzles	68	333501	Promatic	13
222183	Cartridges & cylinders	45	297360	Tacking nozzle	68	333601	Promatic	13
223001	Gardener	62	297380	Nozzles	68	334001	Promatic	13
223101	Gardener	62	297512	Rollers	70	334191	Promatic	12
223097	Gardener	62	297513	Rollers	70	334301	Promatic	12
223511	Easyjet	51	297514	Rollers	70	334401	Promatic	12
228101	Handyjet	59	297515	Rollers	70	334501	Promatic	15
228201	Handyjet	59	297521	Rollers	70	334791	Promatic	12
228202	Handyjet kit	59	297522	Rollers	70	334891	Promatic	12
228203	Handyjet kit	59	297531	Rollers	70	334990	Promatic	13
228301	Handyjet	59	297532	Rollers	70	335002	Promatic	14
228302	Handyjet kit	59	297541	Rollers	71	335102	Promatic	14
228303	Handyjet kit	59	297542	Rollers	71	335302	Promatic	14
229501	Easyjet	51	297551	Rollers	71	335402	Promatic	14
229557	Easyjet	51	297560	Scissors	71	335602	Promatic	14
253501	Powerjet	49	298101	Pro 88	30	335890	Promatic	13
253505	Powerjet Kit	54	298201	Pro 88	30	335990	Promatic	13
253511	Powerjet	49	298601	Pro 88	30	335991	Promatic	15
253512	Powerjet kit	52	299001	TW 5000	73	336611	Promatic	11
253521	Powerjet Kit	54	299005	TW 5000	73	336617	Promatic	11
253547	Powerjet	49	299047	TW 5000	73	336628	Promatic	11
253583	Powerjet Kit	54	299101	TW 5000	73	337030	Soldering Irons	34
261012	Turbojet	57	305401	Regulators	41	337037	Soldering Irons	34
261033	Turbojet	57	305402	Regulators	41	337093	Soldering Irons	34
262033	Turbojet	57	305404	Regulators	41	337302	Promatic	14
264112	Turbojet	57	305405	Regulators	41	338030	Soldering Irons	33
264133	Turbojet	57	305406	Regulators	41	338093	Soldering Irons	33
265012	Regulators	41	305409	Regulators	41	344441	Pro 88	27
265033	Regulators	41	306111	Regulators	41	344442	Pro 88	27
293401	Pro 88	26	306112	Regulators	41	345000	Pro 88	27
294102	Pro 86	21	306115	Regulators	41	346041	Pro 88	27
294202	Pro 88	26	306119	Regulators	41	346042	Pro 88	27
294302	Pro 88	26	306311	Regulators	41	346051	Pro 88	29

Search index

Art no.	Product Category	Page	Art no.	Product Category	Page
346052	Pro 88	29	700301	Promatic	15
347052	Pro 88	29	700350	Soldering Irons	34
348641	Pro 86	19	700353	Soldering Irons	34
348642	Pro 86	19	700400	Soldering Irons	34
348647	Pro 86	19	700500	Soldering Irons	34
348841	Pro 88	25	700550	Soldering Irons	34
348842	Pro 88	25	700800	Soldering Irons	34
348847	Pro 88	25	700992	Grinding-wheel dressers	63
349241	Soldering Irons	36	701002	Grinding-wheel dressers	63
349242	Soldering Irons	36	701012	Grinding-wheel dressers	63
350101	Pro 86	20	701261	LP Gas propane hoses	38
350501	Pro 86	20	701262	Powerjet	49
350601	Pro 88	26	701290	LP Gas propane hoses	38
350701	Pro 88	26	701291	LP Gas propane hoses	38
350801	Pro 88	26	701294	LP Gas propane hoses	38
350902	Pro 86	20	701295	LP Gas propane hoses	38
351001	Pro 88	26	701501	LP Gas propane hoses	38
351102	Pro 86	20	701505	LP Gas propane hoses	38
351703	Pro 86	21	701510	LP Gas propane hoses	38
352403	Pro 86	21	701630	Soldering Irons	35
352503	Pro 86	21	701633	Soldering Irons	35
352890	Pro 86	20	701720	Soldering Irons	35
352990	Pro 86	20	701725	Soldering Irons	35
355001	Pro 88	28	701800	Soldering Irons	35
355501	Pro 88	28	702070	Soldering Irons	35
355601	Pro 88	28	702621	Refillable cylinders Accessories	43
355701	Pro 88	28	702871	Refillable cylinders Accessories	43
356001	Pro 88	29	708121	Pro 86	36
356101	Pro 88	29	709180	LP Gas propane hoses	39
356201	Pro 88	29	709621	LP Gas propane hoses	39
356301	Pro 88	29	711510	LP Gas propane hoses	38
356401	Pro 88	29	711511	LP Gas propane hoses	38
356501	Pro 88	29	715161	LP Gas propane hoses	39
356601	Pro 88	29	716941	Promatic	16
356701	Pro 88	29	717000	LP Gas propane hoses	39
361008	Grinding-wheel dressers	63	717020	LP Gas propane hoses	39
361108	Grinding-wheel dressers	63	717031	Refillable cylinders Accessories	42
361208	Grinding-wheel dressers	63	717241	Promatic	16
393802	Pro 86	20	717320	LP Gas propane hoses	38
393902	Pro 86	20	717321	LP Gas propane hoses	38
394002	Pro 86	21	717331	LP Gas propane hoses	38
394102	Pro 86	21	717341	LP Gas propane hoses	38
410001	Butajet	61	717431	LP Gas propane hoses	38
412001	Butajet	61	720106	Accessories	16
415061	Accessories	16	720730	Regulators	41
415062	Accessories	16	722001	LP Gas propane hoses	39
420001	Butajet	61	754206	LP Gas propane hoses	39
423000	Butajet	61	754210	LP Gas propane hoses	39
430000	Butajet	60	754213	LP Gas propane hoses	39
432000	Butajet	60	754214	LP Gas propane hoses	39
435000	Butajet	60	754215	LP Gas propane hoses	39
600000	Powercase	54	754216	LP Gas propane hoses	39
645000	Regulators	41	757007	Refillable cylinders Accessories	43
700001	Regulators	39	769200	Refillable cylinders Accessories	43
700245	Soldering Irons	33	770015	LP Gas propane hoses	38
700250	Soldering Irons	33	770036	LP Gas propane hoses	38

770037	LP Gas propane hoses	38
770038	LP Gas propane hoses	38
770039	LP Gas propane hoses	38
770044	Pro 88	26
770067	LP Gas propane hoses	39
770082	LP Gas propane hoses	39
770303	Soldering Irons	35
770326	Refillable cylinders Accessories	43
770327	Refillable cylinders Accessories	43
770360	Soldering Irons	35
770512	LP Gas propane hoses	39
836990	LP Gas propane hoses	38
853090	LP Gas propane hoses	38
870201	Powerjet	55
870401	Powerjet	55
870601	Powerjet	55
870701	Powerjet	55
870801	Powerjet	55
871001	Powerjet	55
871601	Light Line	43
871901	Light Line	22
872001	Light Line	22
872304	Light Line	22
872501	Light Line	22
881647	Light Line	43
884104	Refillable cylinders Accessories	42
884204	Light Line	20
884301	Accessories	16
900477	LP Gas propane hoses	39
901359	LP Gas propane hoses	39

Accessories

Merchandise and POS

SIEVERT®

Tool Bags



- New Sievert tool bags perfect for storing and transporting Promatic or Pro torch kits.

Tool bags	500012	500013
Dimensions	Small bag	Large bag

Pallet Covers



Pallet covers	569107	569106
Dimensions	Half EU pallet 80x60 cm	EU pallet 120x80 cm



Other Promotion Material

Rollups
Walls
POS

Contact Sievert



SIEVERT®

Swedish design and quality since 1882.

Sievert AB

P.O. Box 1366
SE-171 26 SOLNA
SWEDEN

Telephone: +46 (0)8 629 22 00

Fax: +46 (0)8 629 22 66

e-mail: info@sievert.se

Internet: www.sievert.se

600023 ©Sievert AB. All rights reserved. Sievert is a registered trademark of Sievert AB. Sievert AB and its partners reserve the right for any missprints.